

Nut for piston rod



AVENTICS™ Nut for piston rod



Piston rod nut MR9



Weight

See table below

Technical data


Part No.	Suitable piston rod thread	Material	Weight	
8103040114	M4	Steel, galvanized	0.001 kg	-
1823300033	M6	Steel, galvanized	0.004 kg	-
1823300034	M8	Steel, galvanized	0.005 kg	-
8103040224	M10	Steel, galvanized	0.011 kg	-
1823A00020	M10x1,25	Steel, galvanized	0.01 kg	-
8103060064	M12	Steel, galvanized	0.017 kg	-
1823A00021	M12x1,25	Steel, galvanized	0.012 kg	-
8103190344	M12x1,25	Steel, galvanized	0.012 kg	-
1823300030	M16x1,5	Steel, galvanized	0.017 kg	-
1823300031	M20x1,5	Steel, galvanized	0.03 kg	-
8103040344	M20x1,5	Steel, galvanized	0.06 kg	-
8103190394	M24x2	Steel, galvanized	0.06 kg	-
1823A00029	M27x2	Steel, galvanized	0.108 kg	-
8103190414	M36x2	Steel, galvanized	0.175 kg	-
8103190424	M42x2	Steel, galvanized	0.37 kg	-
8103190434	M48x2	Steel, galvanized	0.4 kg	-
3330310000	M4	Stainless steel	0.001 kg	-
8103190644	M6	Stainless steel	0.003 kg	-
8103190164	M8	Stainless steel	0.006 kg	-
8103190464	M10x1,25	Stainless steel	0.008 kg	-
3590304000	M12x1,25	Stainless steel	0.02 kg	-
3590305000	M16x1,5	Stainless steel	0.03 kg	1)
3590308000	M20x1,5	Stainless steel	0.05 kg	-
2990600303	M10x1,25	Stainless steel, acid-proof	0.01 kg	-
2990600304	M12x1,25	Stainless steel, acid-proof	0.02 kg	-
2990600305	M16x1,5	Stainless steel, acid-proof	0.03 kg	-
2990600308	M20x1,5	Stainless steel, acid-proof	0.05 kg	-
2990600312	M27x2	Stainless steel, acid-proof	0.07 kg	-
2990600316	M36x2	Stainless steel, acid-proof	0.15 kg	-
2990600325	M42x2	Stainless steel, acid-proof	0.3 kg	-

1) 3590305000 can also be used as an MR3, nut for cylinder mounting.

Technical information

Material	
	Steel Stainless steel Stainless steel, acid-proof
	galvanized

Dimensions

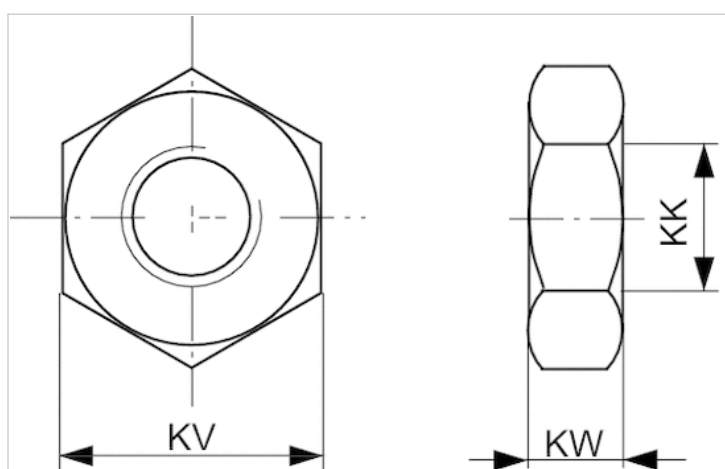

Dimensions

Part No.	KK	KV	KW
1823300033	M6	10	3.2
1823300034	M8	13	4
8103040224	M10	17	8
8103060064	M12	19	10
1823A00021	M12x1,25	19	6
8103190344	M12x1,25	19	6
1823300030	M16x1,5	24	8
1823300031	M20x1,5	30	10
8103040344	M20x1,5	30	10
8103190394	M24x2	36	12
1823A00029	M27x2	41	13.5
8103190414	M36x2	50	16
8103190424	M42x2	60	21
8103190434	M48x2	65	25
3330310000	M4	7	2.2
8103190644	M6	10	3.2
8103190164	M8	13	4
8103190464	M10x1,25	17	5
3590304000	M12x1,25	19	6
3590305000	M16x1,5	24	8

Part No.	KK	KV	KW
3590308000	M20x1,5	30	10
2990600303	M10x1,25	17	5
2990600304	M12x1,25	19	6
2990600305	M16x1,5	24	8
2990600308	M20x1,5	30	10
2990600312	M27x2	41	13.5
2990600316	M36x2	50	16
2990600325	M42x2	60	21

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2017 Emerson Electric Co. All rights reserved.
2019-03



CONSIDER IT SOLVED™