

flo-FLEX

Polyurethane Flex Tubing

When you need it fast, flexible and strong, look to flo-FLEX, it's the **SMART** solution.

Same Day Shipping
Made in the USA
Always In-Stock
Resists kinking
Tested tough

How to Order:

First, choose a size... then, follow that column down to select a color...

1 Choose Your Size

Size	1/8"	1/4"	3/8"	1/2"	5/32"	5/16"	4mm	6mm	8mm	10mm	12mm
Size Code	18	14	38	12	532	516	4m	6m	8m	10m	12m

2 Choose Your Color

Second, select a color by it's code.

	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK
Black	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK	BK
Red	R	R	R	R	R	R	R	R	R	R	R
Blue	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB	NB
Clear	C	C	C	C	C	C	C	C	C	C	C
Clear Blue		CB	CB					CB			
Yellow	Y	Y	Y	Y	Y	Y	Y		Y	Y	Y
White	W	W	W		W	W	W		W		
Green	G	G	G		G	G	G		G		
Orange	OR	OR	OR		OR		OR				

3 Choose Your Length

Third, continuing down from the row above, select an available length.

100'	100'	100'	100'	100'	100'	100'	100'	100'	100'	100'	100'
250'	250'	250'	250'	250'	250'	250'	250'	250'	250'	250'	250'
500'	500'	500'	500'		500'	500'	500'	500'	500'		
1,000'	1,000'	1,000'			1,000'		1,000'	1,000'			

Prepare your order, fill in your selections below


Your order:

FLEX — 1 — 2 — 3

example: (size code) (color code) (length)

FLEX — 6m — CB — 500


* Don't see the Color or Length you want? We can get it, call for availability.

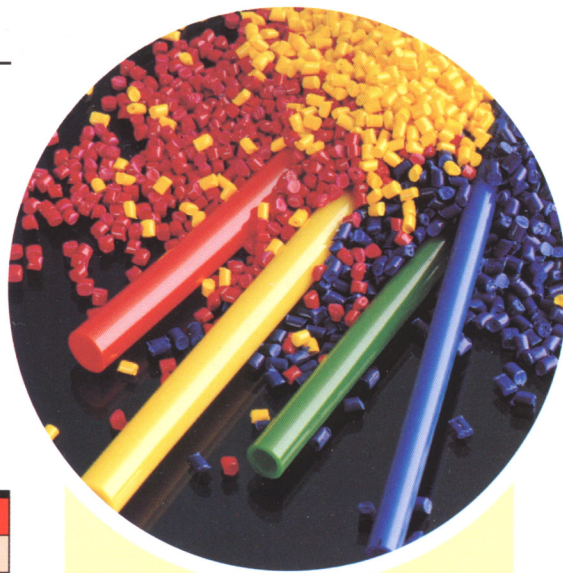

Why flo-FLEX?

KEY FEATURES

- In- Stock
- Same Day Shipping
- Low Cost Solution
- Higher Working Pressure
- Use with Convenient Push-In Style Fittings

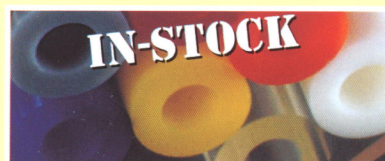

POLYURETHANE SPECS

- Durometer: 95^A
- Vacuum Rating: to 28" Hg.
- Tolerances: 1/8" - 1/2" ±.005"
- Metric: ±.127mm
- Temperature range: -40°F to +165°F
- Working Pressure @ 75°F: 155psi to 265psi (based on tubing size)
- Working Pressure: 3 to 1 safety factor

Orders? Call: 248-625-8890 Questions?

10435 Ortonville Rd., Clarkston, MI 48348 / fax: 248-625-8818 / email: sales@flotronicsinc.com / www.flotronicsinc.com