

# MXB RODLESS BELT DRIVE ACTUATORS

**ENDURANCE TECHNOLOGY**<sup>SM</sup>

A Tolomatic Design Principle<sup>SM</sup>

**U** UNGUIDED

**S** SOLID BEARING

**P** PROFILED RAIL



**LINEAR SOLUTIONS MADE EASY**

# MXB Rodless Belt Drive Actuators






DESIGNED TO OUTLAST EVERY BELT DRIVE ACTUATOR ON THE MARKET



The MXB belt drive electric actuator is exactly what you would expect from the industry's number one rodless supplier. Designed with our exclusive **ENDURANCE TECHNOLOGY**™ features, the MXB delivers superior performance to meet the most demanding applications. Nobody knows rodless like Tolomatic, and the MXB proves it.

- MXB-**U**, MXB-**S** & MXB-**P**: Low profile to fit your application
- MXB-**S**: Engineered bearing material in trapezoidal shape for less wear, low static & dynamic friction
- MXB-**P**: High precision bearings feature smooth, low breakaway motion
- MXB-**P**: Durable profiled rail design uses recirculating ball technology to reduce friction and extend actuator life.
- MXB-**P**: High load and bending moment capacities

## TOLOMATIC'S ELECTRIC RODLESS BELT-DRIVE ACTUATORS


|                             | <b>MXB-U</b>                                                                        | <b>MXB-S</b>                                                                        | <b>MXB-P</b>                                                                         | <b>B3W</b>                                                                            | <b>TKB</b>                                                                            |
|-----------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                             |  |  |  |  |  |
| <b>Speed</b> up to:         | 5,080 mm/sec<br><i>(200 in/sec)</i>                                                 | 2,540 mm/sec<br><i>(100 in/sec)</i>                                                 | 3,810 mm/sec<br><i>(150 in/sec)</i>                                                  | 5,080 mm/sec<br><i>(200 in/sec)</i>                                                   | 2,540 mm/sec<br><i>(100 in/sec)</i>                                                   |
| <b>Stroke Length</b> up to: | 5,080 mm<br><i>(200 in)</i>                                                         | 5,080 mm<br><i>(200 in)</i>                                                         | 5,080 mm<br><i>(200 in)</i>                                                          | 5,258 mm<br><i>(207 in)</i>                                                           | 2,438 mm<br><i>(96 in)</i>                                                            |
| <b>Load</b> up to:          | NA                                                                                  | 236 kg; 2,313 N<br><i>(520 lb)</i>                                                  | 586 kg; 5,745 N<br><i>(1,292 lb)</i>                                                 | 911 kg; 8,932 N<br><i>(2,008 lb)</i>                                                  | 340 kg; 8,932 N<br><i>(750 lb)</i>                                                    |
| <b>Thrust</b> up to:        | 1,859 N<br><i>(418 lbf)</i>                                                         | 1,859 N<br><i>(418 lbf)</i>                                                         | 1,859 N<br><i>(418 lbf)</i>                                                          | 1,446 N<br><i>(325 lbf)</i>                                                           | 1,090 N<br><i>(245 lbf)</i>                                                           |
| <b>Literature Number:</b>   | 8500-4000                                                                           | 8500-4000                                                                           | 8500-4000                                                                            | 3600-4609                                                                             | 2700-4000                                                                             |

*(Not all models deliver maximum values listed, i.e.: Maximum thrust may not be available with maximum speed)*


# MXB Rodless Belt Drive Actuators

## APPLICATIONS


**X-Y Multi-Axis**

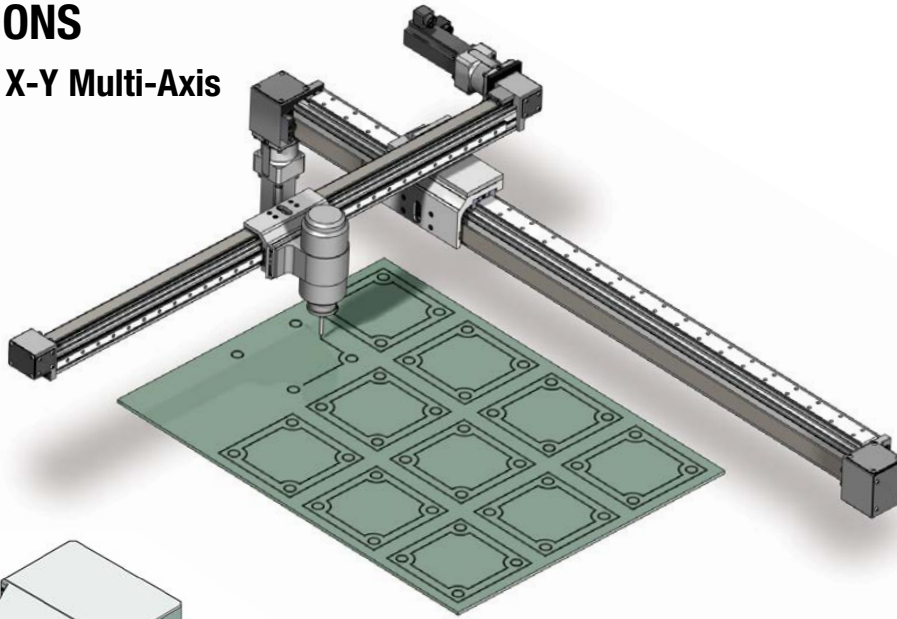

**Workcenter Positioning**

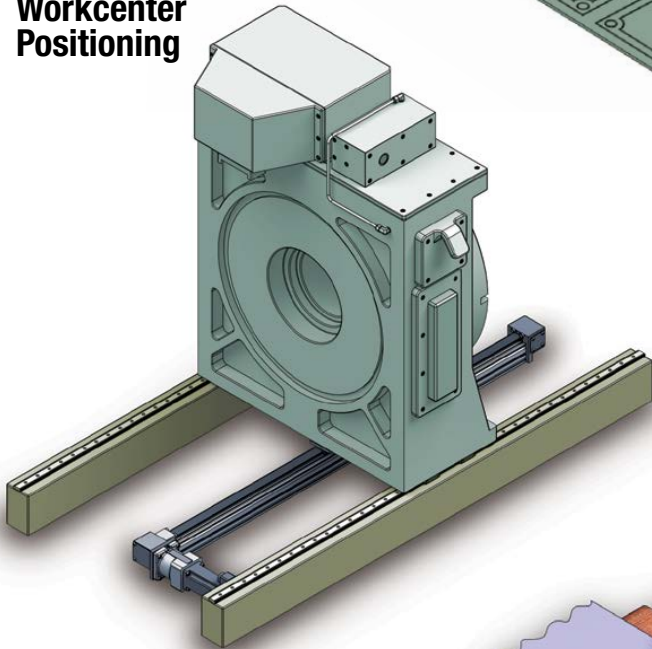

**High Speed Flying Cut Off**

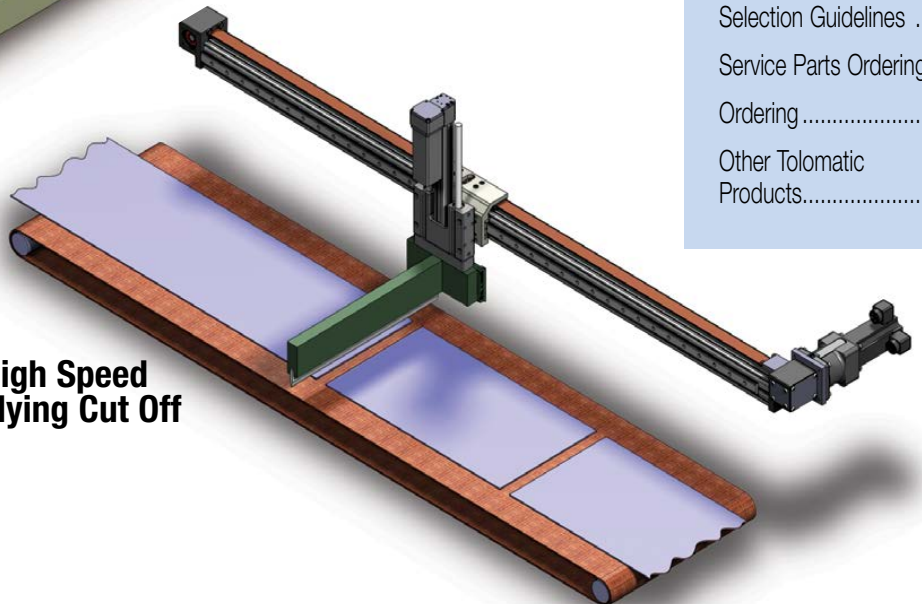

### CONTENTS

- MXB Belt Drive Actuator... 2
- Applications..... 3
- MXB-U Features..... 4
- MXB-S Features ..... 6
- MXB-P Features ..... 8
- Specifications ..... 10
- MXB-U Actuator and Options Dimensions ..... 15
- MXB-S Actuator Dimensions..... 16
- MXB-S Option Dimensions..... 17
- MXB-P Actuator Dimensions..... 18
- MXB-P Option Dimensions..... 19
- Motor Mounting ..... 20
- Switches ..... 22
- Application Data Worksheet ..... 24
- Selection Guidelines ..... 25
- Service Parts Ordering... 26
- Ordering ..... 27
- Other Tolomatic Products..... 28

- Adhesive dispensing
- Aligning
- Animation
- Assembly
- Automotive
- Camera positioning
- Conveyors
- Cutting
- Diverters
- Inspection
- Laser marking
- Material cutting
- Milling
- Packaging equipment
- Parts transfer
- Pick & place
- Positioning
- Product handling
- Pulp & Paper
- Slitting
- Sorting
- Spraying
- Stacking
- Table positioning
- Test stations
- Wire winding



# MXB-**U** UNGUIDED BELT-DRIVE ACTUATOR

## ENDURANCE TECHNOLOGY<sup>SM</sup>

A Tolomatic Design Principle

Endurance Technology<sup>SM</sup> features are designed for maximum durability to provide extended service life.

The MXB-U rodless actuator is a pre-assembled compact linear belt solution for use in applications with existing guides & supports. This economical actuator features speeds up to 5080 mm/sec (200 in/sec) and thrusts up to 1859 N (418 lbf). Built-to-order in stroke lengths up to 5842 mm (200 in).

### MOTOR ORIENTATION

#### YOU CAN CHOOSE:

- Direct drive option directly couples motor to the drive shaft; one-piece housing construction for optimum alignment and support of the motor
- Reduction option in 3:1 reduction (2:1 on MXB16)

### DURABLE BELT MATERIAL

High power polyurethane HTD tooth profile belt with steel tensile members resists stretching

### YOUR MOTOR HERE

#### YOU CAN CHOOSE:


- Specify the device to be installed and actuator ships with proper mounting hardware
- Specify and ship your device to Tolomatic for factory installation
- Motor supplied and installed by Tolomatic

### OVERSIZED PULLEY BEARINGS

Drive shaft assembly incorporates oversized shielded/sealed ball bearings for long life and high speeds

### STEEL REINFORCED/HTD BELT PROFILE

- Belt of polyurethane material reinforced with steel tension members to produce high carrier thrusts without belt stretch.
- HTD tooth profile distributes tooth load more evenly and provides greater tooth shear strength, allowing for higher thrust loading.
- The deep teeth of the HTD profile are cogging-resistant, preventing potentially damaging positioning errors.



# Tolomatic... MAXIMUM DURABILITY

EXCELLENCE IN MOTION

## INCH OR METRIC MOUNTING

Your choice of blank, inch (US standard) or metric mounting to the plate

## LOW PLATE HEIGHT

Reduces overall actuator envelope

## EXTERNAL BUMPERS

Polyurethane bumpers protect the belt and clamp assembly from damage at end-of-stroke

## BELT TENSIONING SYSTEM


The open slot on the guide plate permits easy access to the belt tensioning screw. No disassembly required

## LIGHTWEIGHT ALUMINUM DESIGN

Clear anodized extrusion design is optimized for rigidity and strength

NOTE: Boxed letters indicate ordering codes

## OPTIONS



### MOUNTING PLATES **M****P**

- Provides clearance for motor and mount
- 16,25,32 sizes attach with T-Nuts
- 40,50,63 sizes attach with Tube Clamps



### HEAD COVER PLATE **H****C****2**

- Provides protection for pulley and bearing



### TUBE CLAMPS **T****C**

- Used for intermediate support
- Flush with bottom of actuator to retain low profile
- Drop-in, adjustable mounting locations (Not available on the MXB16U)



### SWITCHES

- Wide variety of sensing choices: Reed, Solid State PNP or NPN, available normally open or normally closed
- Flush mount, drop-in installation
- Bright LEDs, power & signal indication
- CE rated, RoHS compliant

# MXB-S SOLID BEARING BELT-DRIVE

## ENDURANCE TECHNOLOGY<sup>SM</sup>

A Tolomatic Design Principle

Endurance Technology<sup>SM</sup> features are designed for maximum durability to provide extended service life.

The MXB-S rodless style actuator is a compact linear belt solution for use in applications requiring light to moderate load carrying and guidance. The MXB-S actuator utilizes two field replaceable solid bearings that optimize stress distribution for optimal performance, rigidity and life. This economical actuator features speeds up to 2540 mm/sec (100 in/sec) and thrusts up to 1859 N (418 lbf). Built-to-order in stroke lengths up to 5080 mm (200 in).

**LARGE FLEXIBLE MOUNTING PATTERN**


- Carrier gives more load stability
- Directly compatible with existing BCS & BC2 applications
- More fastening options

**BELT TENSIONING SYSTEM**

The open slot on the guide plate permits easy access to the belt tensioning screw. No disassembly required

**EXTERNAL BUMPERS**

Polyurethane bumpers protect the belt and clamp assembly from damage at end-of-stroke

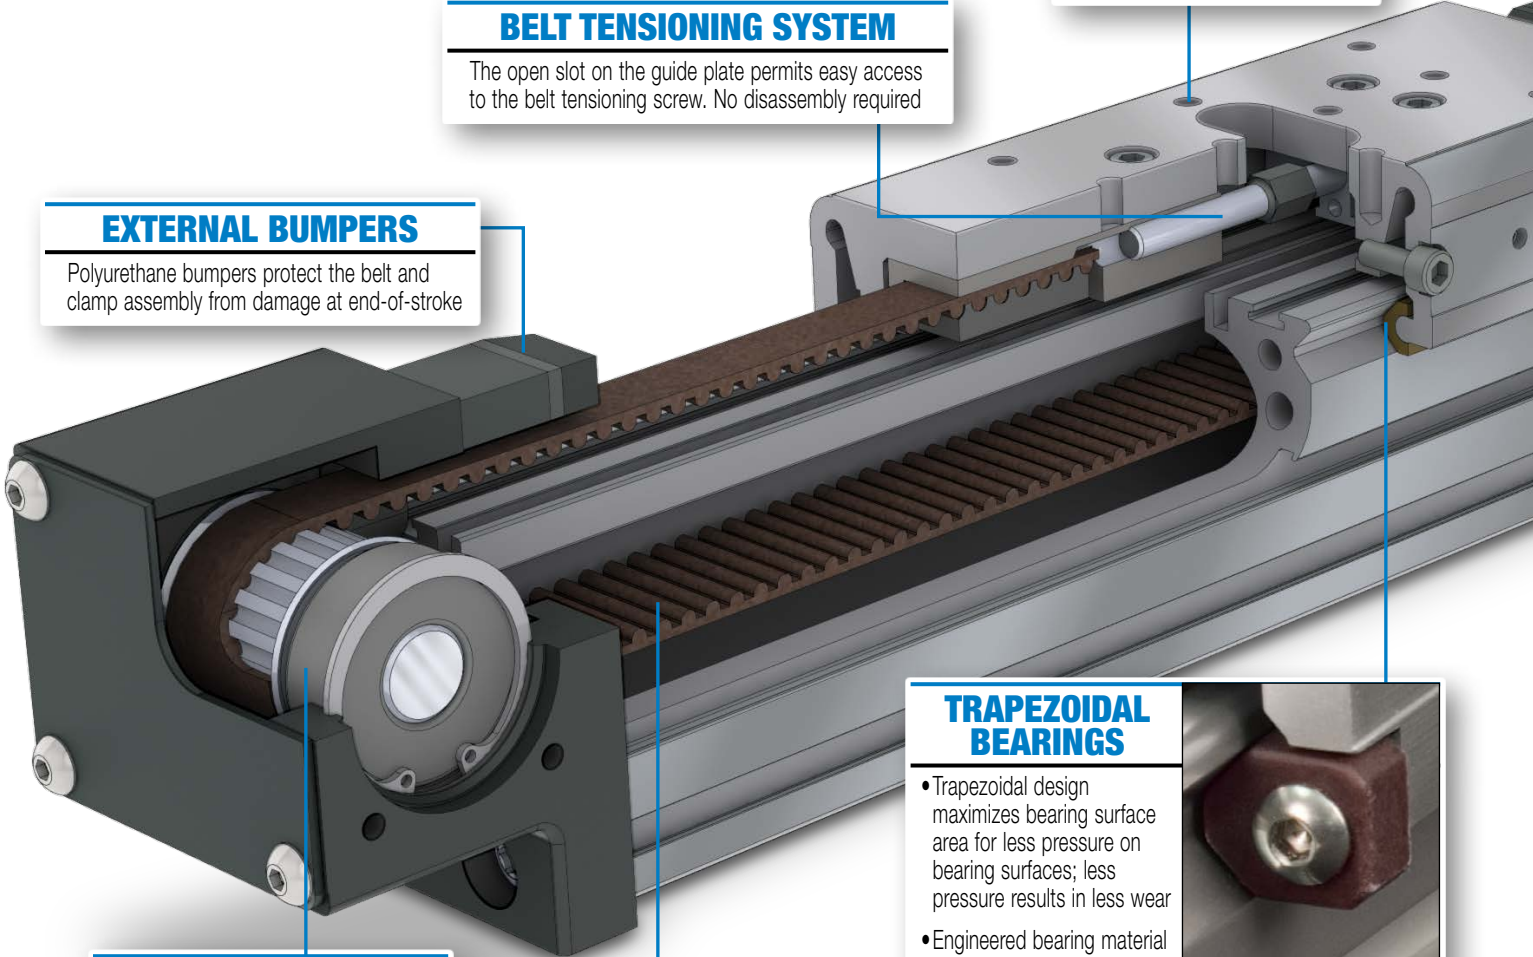

**OVERSIZED PULLEY BEARINGS**


Drive shaft assembly incorporates oversized shielded/sealed ball bearings for long life and high speeds

**DURABLE BELT MATERIAL**

High power polyurethane HTD tooth profile belt with steel tensile members resists stretching

**TRAPEZOIDAL BEARINGS**

- Trapezoidal design maximizes bearing surface area for less pressure on bearing surfaces; less pressure results in less wear
- Engineered bearing material has low static and dynamic friction with low wear properties for long lasting, smooth operation
- Bearings are field replaceable for extended service life

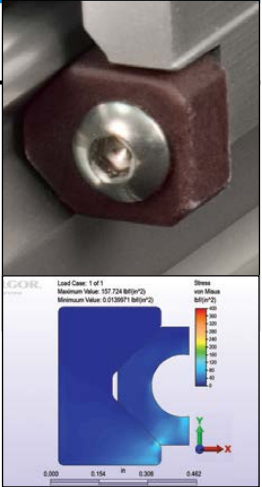



## INCH OR METRIC MOUNTING

Your choice of blank, inch (US standard) or metric mounting to the plate

## MOTOR ORIENTATION


### YOU CAN CHOOSE:

- Direct drive option directly couples motor to the drive shaft; one-piece housing construction for optimum alignment and support of the motor
- Reduction option in 3:1 reduction (2:1 on MXB16)

## YOUR MOTOR HERE


### YOU CAN CHOOSE:

- Specify the device to be installed and actuator ships with proper mounting hardware
- Specify and ship your device to Tolomatic for factory installation
- Motor supplied and installed by Tolomatic

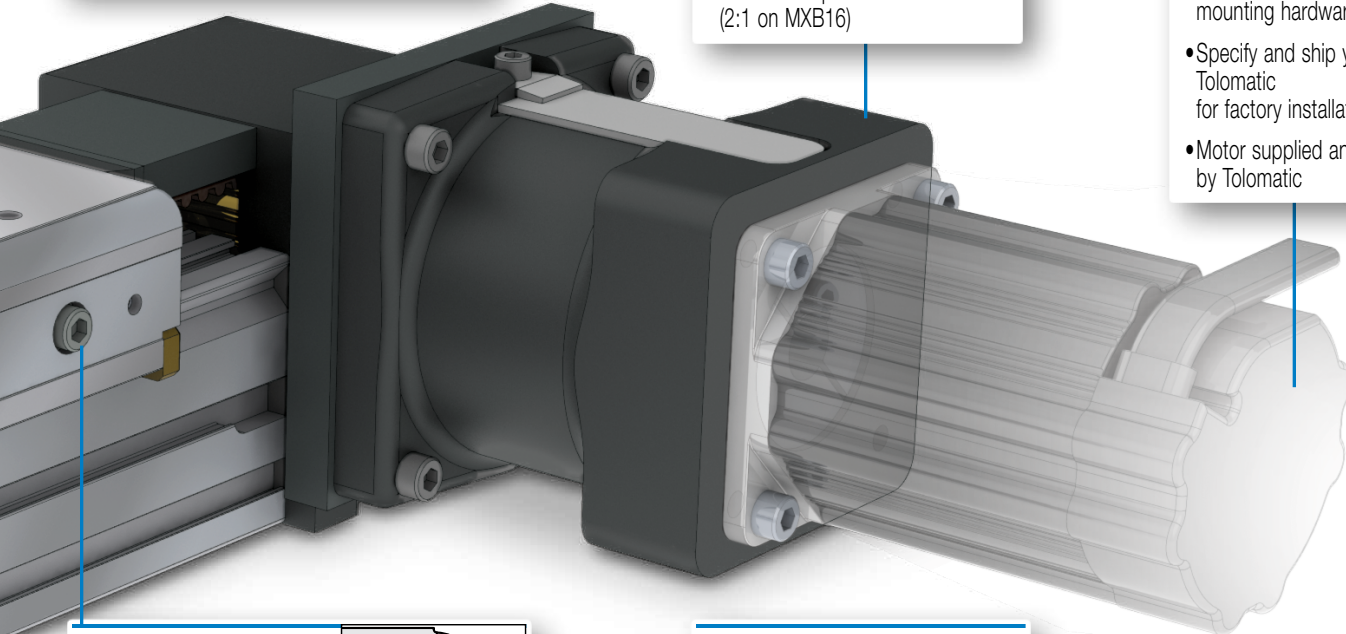

## NON-BINDING BEARING ARMS

Bearings are tensioned indirectly, providing bind free adjustment



## LIGHTWEIGHT ALUMINUM DESIGN

Clear anodized extrusion design is optimized for rigidity and strength

## OPTIONS



### AUXILIARY CARRIER **D****C**

- 2X higher Fz (load) capacity
- High bending moment capacity



### FLOATING MOUNT **F****L**

- Compensates for non-parallelism between MX actuator and externally guided load



### TUBE CLAMPS **T****C**

- Used for intermediate support
- Flush with bottom of actuator to retain low profile
- Drop-in, adjustable mounting locations (MXB16 uses T-nuts with mounting plates)

NOTE: Boxed letters indicate ordering codes



### MOUNTING PLATES **M****P**

- Provides clearance for motor and mount
- 16,25,32 sizes attach with T-Nuts
- 40,50,63 sizes attach with Tube Clamps



### HEAD COVER PLATE **H****C****2**

- Provides protection for pulley and bearing



### SWITCHES

- Wide variety of sensing choices: Reed, Solid State PNP or NPN, available normally open or normally closed
- Flush mount, drop-in installation
- Bright LEDs, power & signal indication
- CE rated, RoHS compliant

# MXB-**P** PROFILED RAIL BELT-DRIVE ACTUATOR

## **ENDURANCE TECHNOLOGY**<sup>SM</sup>

A Tolomatic Design Principle

*Endurance Technology<sup>SM</sup> features are designed for maximum durability to provide extended service life.*

The MXB-P rodless electric belt-drive actuator is designed for applications requiring moderate to heavy load carrying and guidance. The MXB-P actuator features a profiled rail system with recirculating ball linear guides for optimal performance. The MXB-P belt-driven actuator features speeds up to 3810 mm/sec (150 in/sec) and thrusts up to 1859 N (418 lbf). Built-to-order in stroke lengths up to 5080 mm (200 in).

### **LOW CARRIER HEIGHT**

- Reduces overall actuator envelope
- Large mounting pattern for excellent load stability

### **DURABLE BELT MATERIAL**

High power polyurethane HTD tooth profile belt with steel tensile members resists stretching

### **OVERSIZED PULLEY BEARINGS**

Drive shaft assembly incorporates oversized shielded/sealed ball bearings for long life and high speeds

### **MOTOR ORIENTATION**

#### **YOU CAN CHOOSE:**

- Direct drive option directly couples motor to the drive shaft; one-piece housing construction for optimum alignment and support of the motor
- Reduction option in 3:1 reduction (2:1 on MXB16)

### **YOUR MOTOR HERE**

#### **YOU CAN CHOOSE:**

- Specify the device to be installed and actuator ships with proper mounting hardware
- Specify and ship your device to Tolomatic for factory installation
- Motor supplied and installed by Tolomatic



## INCH OR METRIC MOUNTING

Your choice of blank, inch (US standard) or metric mounting to the plate

## LIGHTWEIGHT ALUMINUM DESIGN

Clear anodized extrusion design is optimized for rigidity and strength

## EXTERNAL BUMPERS


Polyurethane bumpers protect the belt and clamp assembly from damage at end-of-stroke

## BELT TENSIONING SYSTEM

The open slot on the guide plate permits easy access to the belt tensioning screw. No disassembly required

## RECIRCULATING BALL BEARINGS

- Recirculating ball bearings are used to reduce friction and extend actuator life
- Designed with a grease pocket between ball elements to reduce friction, noise and maintenance
- Large permissible moment loads
- High speed operation, low heat generation
- High precision, smooth, low friction motion

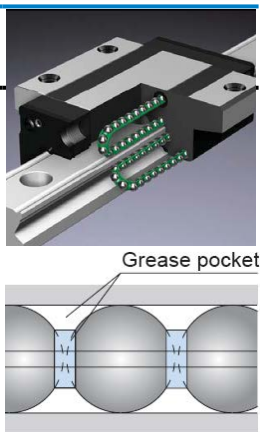

NOTE: Boxed letters indicate ordering codes

## OPTIONS



### AUXILIARY CARRIER **D****C**

- 2X higher Fz & Fy (load) capacity
- High bending moment capacity



### MOUNTING PLATES **M****P**

- Provides clearance for motor and mount
- 16,25,32 sizes attach with T-Nuts
- 40,50,63 sizes attach with Tube Clamps



### TUBE CLAMPS **T****C**

- Used for intermediate support
  - Flush with bottom of actuator to retain low profile
  - Drop-in adjustable mounting locations
- (Not available on the 16, 25 or 32 MXB-P sizes)



### HEAD COVER PLATE **H****C****2**

- Provides protection for pulley and bearing



### SWITCHES

- Wide variety of sensing choices: Reed, Solid State PNP or NPN, available normally open or normally closed
- Flush mount, drop-in installation
- Bright LEDs, power & signal indication
- CE rated, RoHS compliant

# MXB Rodless Belt Drive Actuators

## ACTUATOR SPECIFICATIONS AND BREAKAWAY TORQUE

| MXB U, S & P |            |                  |                   |                 |              | BREAKAWAY TORQUE |                           |
|--------------|------------|------------------|-------------------|-----------------|--------------|------------------|---------------------------|
| MXB SIZE     | BELT WIDTH | BELT DEAD LENGTH | PULLEY PITCH DIA. | STROKE PER REV. | *MAX. STROKE | SINGLE CARRIER   | AUX. CARRIER OPT. (MXB-P) |
|              | mm         | mm               | mm                | mm              | m            | N-m              | N-m                       |
| 16           | 10         | 363.0            | 19.1              | 60.1            | 5.84         | 0.452            | 0.678                     |
| 25           | 18         | 475.5            | 25.5              | 80.0            | 5.19         | 0.565            | 0.791                     |
| 32           | 25         | 556.0            | 31.8              | 100.0           | 5.16         | 0.904            | 1.130                     |
| 40           | 30         | 633.7            | 38.2              | 120.0           | 5.14         | 1.130            | 1.356                     |
| 50           | 40         | 692.2            | 44.6              | 140.0           | 5.13         | 1.695            | 2.034                     |
| 63           | 50         | 917.2            | 54.1              | 170.0           | 2.60         | 2.260            | 2.825                     |

| MXB U, S & P |            |                  |                   |                 |              | BREAKAWAY TORQUE |                           |
|--------------|------------|------------------|-------------------|-----------------|--------------|------------------|---------------------------|
| MXB SIZE     | BELT WIDTH | BELT DEAD LENGTH | PULLEY PITCH DIA. | STROKE PER REV. | *MAX. STROKE | SINGLE CARRIER   | AUX. CARRIER OPT. (MXB-P) |
|              | in         | in               | in                | in              | in           | lb-in            | lb-in                     |
| 16           | 0.39       | 14.29            | 0.753             | 2.366           | 230          | 4.0              | 6.0                       |
| 25           | 0.71       | 18.72            | 1.003             | 3.151           | 204          | 5.0              | 7.0                       |
| 32           | 0.98       | 21.89            | 1.253             | 3.936           | 203          | 8.0              | 10.0                      |
| 40           | 1.18       | 24.95            | 1.504             | 4.725           | 202          | 10.0             | 12.0                      |
| 50           | 1.57       | 27.25            | 1.754             | 5.510           | 201          | 15.0             | 18.0                      |
| 63           | 1.97       | 36.11            | 2.130             | 6.692           | 102          | 20.0             | 25.0                      |

\*Longer lengths may be possible with use of tube couplers - Contact Tolomatic

| MXB-U SIZE | WEIGHT         |                         |               |                  | INERTIA                      |                                                    |                    |
|------------|----------------|-------------------------|---------------|------------------|------------------------------|----------------------------------------------------|--------------------|
|            | PLATE ASSEMBLY | BELT TENSIONER ASSEMBLY | BASE ACTUATOR | PER cm OF STROKE | DRIVE/IDLE PULLEY ASSEMBLIES | PLATE ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) | PER cm OF STROKE   |
|            | kg             | kg                      | kg            | kg/cm            | kg-cm <sup>2</sup>           | kg-cm <sup>2</sup>                                 | kg-cm <sup>2</sup> |
| 16         | 0.05           | 0.05                    | 0.72          | 0.0150           | 0.0250                       | 0.0870                                             | 0.0006             |
| 25         | 0.12           | 0.07                    | 1.17          | 0.0246           | 0.0759                       | 0.3073                                             | 0.0020             |
| 32         | 0.22           | 0.13                    | 1.89          | 0.0423           | 0.4143                       | 0.8906                                             | 0.0043             |
| 40         | 0.41           | 0.21                    | 3.55          | 0.0629           | 1.0884                       | 2.2430                                             | 0.0075             |
| 50         | 0.47           | 0.33                    | 4.50          | 0.0843           | 2.1196                       | 3.9449                                             | 0.0135             |
| 63         | 1.15           | 0.38                    | 7.46          | 0.1488           | 5.7101                       | 11.1931                                            | 0.0249             |

| MXB-U SIZE | WEIGHT         |                         |               |                  | INERTIA                      |                                                    |                    |
|------------|----------------|-------------------------|---------------|------------------|------------------------------|----------------------------------------------------|--------------------|
|            | PLATE ASSEMBLY | BELT TENSIONER ASSEMBLY | BASE ACTUATOR | PER in OF STROKE | DRIVE/IDLE PULLEY ASSEMBLIES | PLATE ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) | PER in OF STROKE   |
|            | lb             | lb                      | lb            | lb/in            | lb-in <sup>2</sup>           | lb-in <sup>2</sup>                                 | lb-in <sup>2</sup> |
| 16         | 0.11           | 0.10                    | 1.59          | 0.084            | 0.0085                       | 0.0297                                             | 0.0005             |
| 25         | 0.27           | 0.15                    | 2.59          | 0.138            | 0.0259                       | 0.1050                                             | 0.0017             |
| 32         | 0.48           | 0.30                    | 4.17          | 0.237            | 0.1416                       | 0.3043                                             | 0.0037             |
| 40         | 0.90           | 0.46                    | 7.83          | 0.352            | 0.3719                       | 0.7665                                             | 0.0065             |
| 50         | 1.03           | 0.72                    | 9.93          | 0.472            | 0.7243                       | 1.3480                                             | 0.0117             |
| 63         | 2.54           | 0.83                    | 16.44         | 0.833            | 1.9512                       | 3.8249                                             | 0.0216             |

| MXB-S SIZE | WEIGHT           |                         |               |                  | INERTIA                      |                                                      |                    |                    |
|------------|------------------|-------------------------|---------------|------------------|------------------------------|------------------------------------------------------|--------------------|--------------------|
|            | CARRIER ASSEMBLY | BELT TENSIONER ASSEMBLY | BASE ACTUATOR | PER cm OF STROKE | DRIVE/IDLE PULLEY ASSEMBLIES | CARRIER ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) |                    | PER cm OF STROKE   |
|            |                  |                         |               |                  |                              | SINGLE CARRIER                                       | AUX. CARRIER OPT.  |                    |
|            | kg               | kg                      | kg            | kg/cm            | kg-cm <sup>2</sup>           | kg-cm <sup>2</sup>                                   | kg-cm <sup>2</sup> | kg-cm <sup>2</sup> |
| 16         | 0.15             | 0.05                    | 0.84          | 0.0150           | 0.0250                       | 0.1782                                               | 0.3151             | 0.0006             |
| 25         | 0.24             | 0.07                    | 1.65          | 0.0246           | 0.0759                       | 0.5060                                               | 0.9035             | 0.0020             |
| 32         | 0.45             | 0.14                    | 2.63          | 0.0423           | 0.4143                       | 1.4879                                               | 2.6365             | 0.0043             |
| 40         | 0.80             | 0.21                    | 5.06          | 0.0629           | 1.0884                       | 3.6828                                               | 6.6119             | 0.0075             |
| 50         | 1.17             | 0.33                    | 7.35          | 0.0843           | 2.1196                       | 7.4111                                               | 13.1956            | 0.0135             |
| 63         | 3.42             | 0.38                    | 14.56         | 0.1488           | 5.7101                       | 27.7891                                              | 52.8158            | 0.0249             |

| MXB-S SIZE | WEIGHT           |                         |               |                  | INERTIA                      |                                                      |                    |                    |
|------------|------------------|-------------------------|---------------|------------------|------------------------------|------------------------------------------------------|--------------------|--------------------|
|            | CARRIER ASSEMBLY | BELT TENSIONER ASSEMBLY | BASE ACTUATOR | PER in OF STROKE | DRIVE/IDLE PULLEY ASSEMBLIES | CARRIER ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) |                    | PER in OF STROKE   |
|            |                  |                         |               |                  |                              | SINGLE CARRIER                                       | AUX. CARRIER OPT.  |                    |
|            | lb               | lb                      | lb            | lb/in            | lb-in <sup>2</sup>           | lb-in <sup>2</sup>                                   | lb-in <sup>2</sup> | lb-in <sup>2</sup> |
| 16         | 0.33             | 0.10                    | 1.86          | 0.084            | 0.0085                       | 0.0609                                               | 0.1077             | 0.0005             |
| 25         | 0.54             | 0.15                    | 3.64          | 0.138            | 0.0259                       | 0.1729                                               | 0.3087             | 0.0017             |
| 32         | 1.00             | 0.30                    | 5.80          | 0.237            | 0.1416                       | 0.5084                                               | 0.9009             | 0.0037             |
| 40         | 1.77             | 0.46                    | 11.16         | 0.352            | 0.3719                       | 1.2585                                               | 2.2594             | 0.0065             |
| 50         | 2.57             | 0.72                    | 16.20         | 0.472            | 0.7243                       | 2.5325                                               | 4.5092             | 0.0117             |
| 63         | 7.54             | 0.83                    | 32.10         | 0.833            | 1.9512                       | 9.4960                                               | 18.0481            | 0.0216             |

| MXB-P SIZE | WEIGHT           |                         |               |                  | INERTIA                      |                                                      |                    |                    |
|------------|------------------|-------------------------|---------------|------------------|------------------------------|------------------------------------------------------|--------------------|--------------------|
|            | CARRIER ASSEMBLY | BELT TENSIONER ASSEMBLY | BASE ACTUATOR | PER cm OF STROKE | DRIVE/IDLE PULLEY ASSEMBLIES | CARRIER ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) |                    | PER cm OF STROKE   |
|            |                  |                         |               |                  |                              | SINGLE CARRIER                                       | AUX. CARRIER OPT.  |                    |
|            | kg               | kg                      | kg            | kg/cm            | kg-cm <sup>2</sup>           | kg-cm <sup>2</sup>                                   | kg-cm <sup>2</sup> | kg-cm <sup>2</sup> |
| 16         | 0.18             | 0.05                    | 1.08          | 0.0183           | 0.0250                       | 0.2014                                               | 0.3615             | 0.0006             |
| 25         | 0.38             | 0.07                    | 1.98          | 0.0348           | 0.0759                       | 0.7297                                               | 1.3508             | 0.0020             |
| 32         | 0.74             | 0.13                    | 3.55          | 0.0569           | 0.4143                       | 2.2232                                               | 4.1072             | 0.0043             |
| 40         | 1.14             | 0.21                    | 6.38          | 0.0959           | 1.0884                       | 4.9138                                               | 9.0740             | 0.0075             |
| 50         | 2.28             | 0.33                    | 9.45          | 0.1337           | 2.1196                       | 12.9416                                              | 24.2565            | 0.0135             |
| 63         | 4.25             | 0.38                    | 16.89         | 0.1981           | 5.7101                       | 33.8324                                              | 64.9024            | 0.0249             |

| MXB-P SIZE | WEIGHT           |                         |               |                  | INERTIA                      |                                                      |                    |                    |
|------------|------------------|-------------------------|---------------|------------------|------------------------------|------------------------------------------------------|--------------------|--------------------|
|            | CARRIER ASSEMBLY | BELT TENSIONER ASSEMBLY | BASE ACTUATOR | PER in OF STROKE | DRIVE/IDLE PULLEY ASSEMBLIES | CARRIER ASSEMBLY (INCLUDING BELT TENSIONER ASSEMBLY) |                    | PER in OF STROKE   |
|            |                  |                         |               |                  |                              | SINGLE CARRIER                                       | AUX. CARRIER OPT.  |                    |
|            | lb               | lb                      | lb            | lb/in            | lb-in <sup>2</sup>           | lb-in <sup>2</sup>                                   | lb-in <sup>2</sup> | lb-in <sup>2</sup> |
| 16         | 0.39             | 0.10                    | 2.38          | 0.102            | 0.0085                       | 0.0688                                               | 0.1235             | 0.0005             |
| 25         | 0.84             | 0.15                    | 4.36          | 0.195            | 0.0259                       | 0.2493                                               | 0.4616             | 0.0017             |
| 32         | 1.64             | 0.30                    | 7.83          | 0.318            | 0.1416                       | 0.7597                                               | 1.4035             | 0.0037             |
| 40         | 2.51             | 0.46                    | 14.07         | 0.537            | 0.3719                       | 1.6791                                               | 3.1007             | 0.0065             |
| 50         | 5.03             | 0.72                    | 20.84         | 0.749            | 0.7243                       | 4.4224                                               | 8.2889             | 0.0117             |
| 63         | 9.36             | 0.83                    | 37.24         | 1.110            | 1.9512                       | 11.5611                                              | 22.1783            | 0.0216             |

**MAXIMUM VELOCITY U** 5080 mm/sec *200 in/sec*

**MAXIMUM VELOCITY S** 2540 mm/sec *100 in/sec*

**MAXIMUM VELOCITY P** 3810 mm/sec *150 in/sec*

**MAXIMUM ACCELERATION** 30.48 m/sec<sup>2</sup> *1200 in/sec<sup>2</sup>*

**REPEATABILITY** ± 0.051 mm *± 0.002 in*

**TEMPERATURE RANGE** -12 to 54 °C *10 to 130 °F*

⚠ Heat generated by the motor and drive should be taken into consideration as well as linear velocity and work cycle time. For applications that require operation outside of the recommended temperature range, contact the factory.


**STRAIGHTNESS, FLATNESS** 0.01702 L mm *0.00067 L in*  
Actuator mounted on a flat surface and fully restrained (see Mounting Plate Requirements, page MXB\_11) L = Maximum distance between supports

⚠ The listed values relating to straightness/flatness are intended for reference purposes only, and not as an engineering standard of absolute tolerance for a given actuator. Appropriate installation is the single most important factor in reducing variation, so good engineering practices such as measurement, mapping, etc. must be employed in applications with stringent straightness/flatness requirements.




## S & P TUBE CLAMP REQUIREMENTS


### S SOLID BEARING

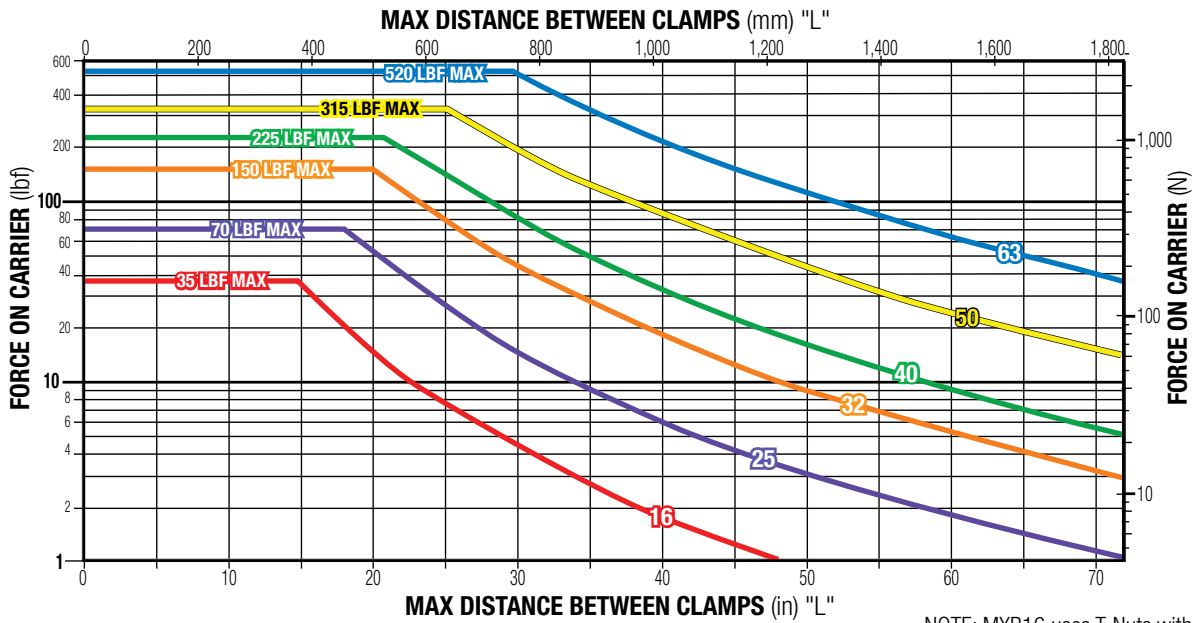


NOTE: MXB16 uses T-Nuts with mounting plates

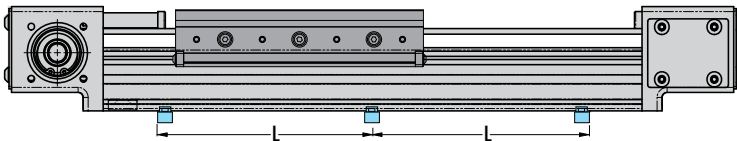

### P PROFILE RAIL BEARING

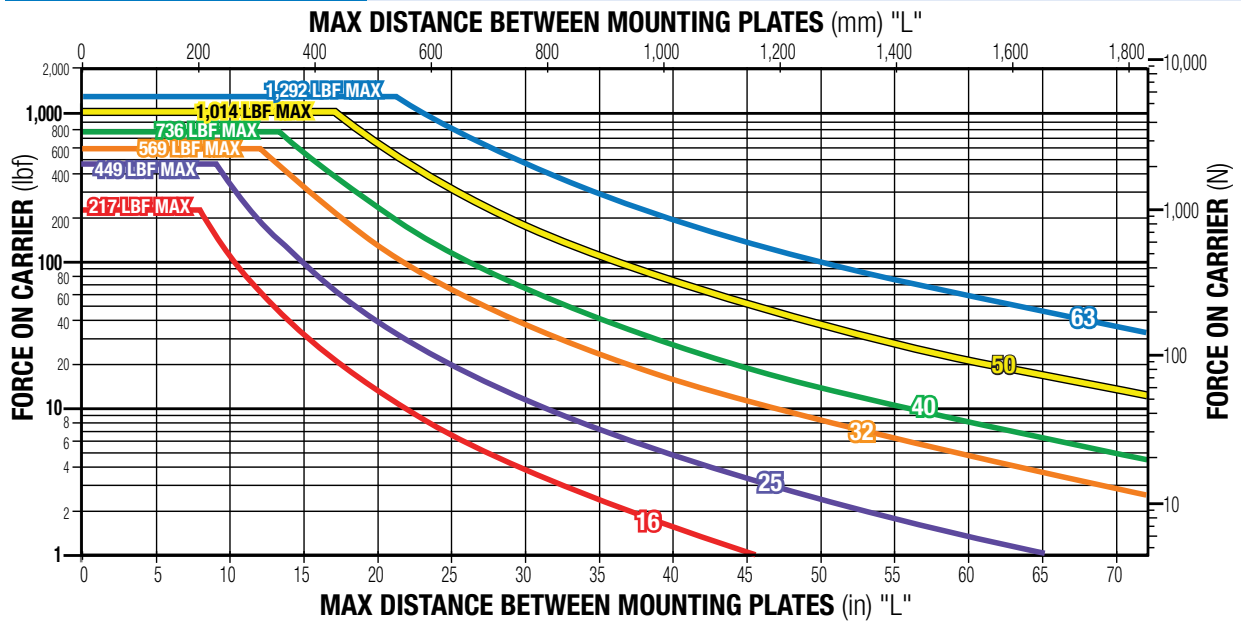

NOTE: MXB16 uses T-Nuts with mounting plates

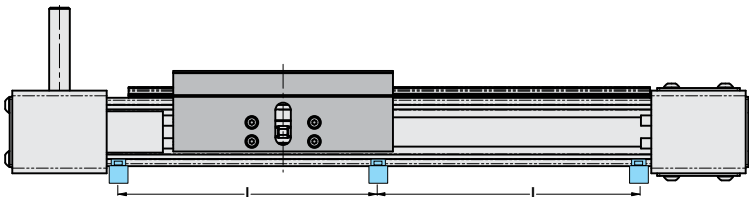




# MXB-S Rodless Belt Drive Actuators

## S SOLID BEARING MOMENT AND LOAD CAPACITY


### STANDARD CARRIER

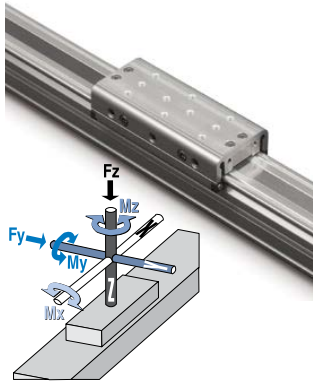

| SIZE | MAX. BENDING MOMENTS |       |      | MAX. LOAD |
|------|----------------------|-------|------|-----------|
|      | Mx                   | My    | Mz   | Fz        |
|      | N-m                  | N-m   | N-m  | N         |
| 16   | 2.5                  | 2.1   | 2.8  | 156       |
| 25   | 6.8                  | 12.4  | 3.8  | 311       |
| 32   | 11.3                 | 39.5  | 15.8 | 667       |
| 40   | 31.1                 | 67.8  | 24.9 | 1,001     |
| 50   | 35.6                 | 131.0 | 38.5 | 1,401     |
| 63   | 66.1                 | 264.0 | 58.8 | 2,313     |

| SIZE | MAX. BENDING MOMENTS |        |        | MAX. LOAD |
|------|----------------------|--------|--------|-----------|
|      | Mx                   | My     | Mz     | Fz        |
|      | in-lbs               | in-lbs | in-lbs | lbf       |
| 16   | 22                   | 19     | 25     | 35        |
| 25   | 60                   | 110    | 34     | 70        |
| 32   | 100                  | 350    | 140    | 150       |
| 40   | 275                  | 600    | 220    | 225       |
| 50   | 315                  | 1,155  | 341    | 315       |
| 63   | 585                  | 2,340  | 520    | 520       |

### D/AUXILIARY CARRIER

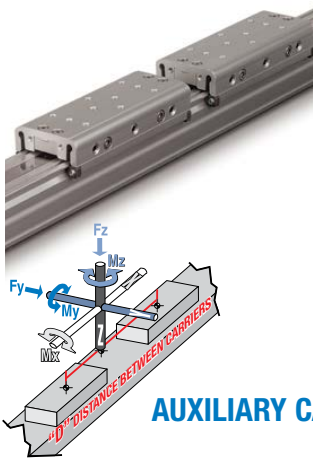


| SIZE | "D" MIN. | MAX. BENDING MOMENTS* |       |       | MAX. LOAD |
|------|----------|-----------------------|-------|-------|-----------|
|      |          | Mxa                   | Mya   | Mza   | Fza       |
|      |          | N-m                   | N-m   | N-m   | N         |
| 16   | 127      | 5.0                   | 19.8  | 19.8  | 311       |
| 25   | 152      | 13.6                  | 47.5  | 47.5  | 623       |
| 32   | 178      | 22.6                  | 119.0 | 119.0 | 1,334     |
| 40   | 216      | 62.1                  | 216.0 | 216.0 | 2,002     |
| 50   | 218      | 71.2                  | 306.0 | 306.0 | 2,802     |
| 63   | 330      | 132.0                 | 764.0 | 764.0 | 4,626     |

| SIZE | "D" MIN. | MAX. BENDING MOMENTS* |        |        | MAX. LOAD |
|------|----------|-----------------------|--------|--------|-----------|
|      |          | Mxa                   | Mya    | Mza    | Fza       |
|      |          | in-lbs                | in-lbs | in-lbs | lbf       |
| 16   | 5.0      | 44                    | 175    | 175    | 70        |
| 25   | 6.0      | 120                   | 420    | 420    | 140       |
| 32   | 7.0      | 200                   | 1,050  | 1,050  | 300       |
| 40   | 8.5      | 550                   | 1,913  | 1,913  | 450       |
| 50   | 8.6      | 630                   | 2,709  | 2,709  | 630       |
| 63   | 13.0     | 1,170                 | 6,760  | 6,760  | 1,040     |

\*At minimum "D" distance see graph below for complete information

### AUXILIARY CARRIER BENDING MOMENTS WITH INCREASED "D" DISTANCE BETWEEN CARRIERS

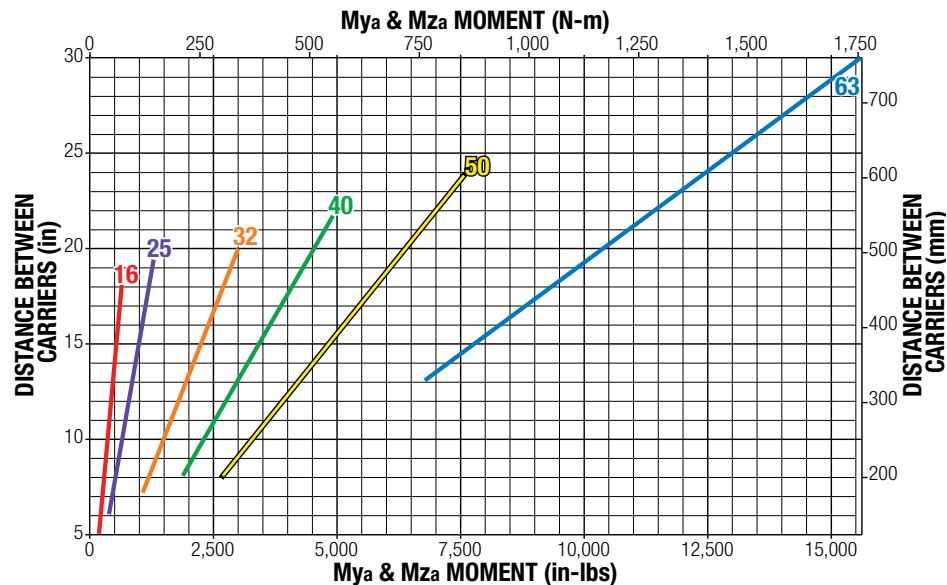

Ratings were calculated with the following conditions:

- 1.) Coupling between carriers is rigid.
- 2.) Load is equally distributed between carriers.
- 3.) Coupling device applies no misalignment loads to carriers.

**⚠ The above ratings are the maximum values for shock-free, vibration-free operation in a typical industrial environment, which must not be exceeded even in dynamic operation. Contact Tolomatic for assistance in selecting the most appropriate actuator for your application.**

The moment and load capacity of the actuator bearing system is based on an L10 life of 5,000 linear km (2x10<sup>9</sup> in) of travel. Life of the actuator will vary for each application depending on the combined loads, motion parameters and operating conditions. The load factor (L<sub>F</sub>) for each application must not exceed a value of 1, as calculated below. Exceeding a load factor of 1 will diminish the actuator rated life. **With combined loads, L<sub>F</sub> must not exceed the value 1.**


$$L_F = \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} + \frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} \leq 1$$

# MXB-P Rodless Belt Drive Actuators

## PROFILED RAIL BEARING MOMENT AND LOAD CAPACITY

⚠ Mating surface of mounted component must maintain a flatness of at least 0.040mm [0.0015"]


### STANDARD CARRIER

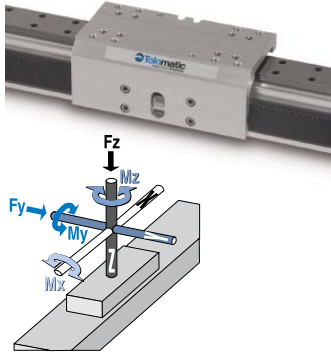

| SIZE | MAX. BENDING MOMENTS |       |       | MAX. LOAD | MAX. THRUST |
|------|----------------------|-------|-------|-----------|-------------|
|      | Mx                   | My    | Mz    | Fy & Fz   | THRUST      |
|      | N-m                  | N-m   | N-m   | N         | N           |
| 16   | 4.5                  | 38.3  | 38.3  | 966       | 169         |
| 25   | 14.3                 | 56.7  | 42.6  | 1,996     | 672         |
| 32   | 25.6                 | 152.0 | 152.0 | 2,531     | 930         |
| 40   | 68.2                 | 216.0 | 216.0 | 3,274     | 1,112       |
| 50   | 91.7                 | 394.0 | 394.0 | 4,510     | 1,446       |
| 63   | 115.0                | 603.0 | 603.0 | 5,745     | 1,859       |

| SIZE | MAX. BENDING MOMENTS |        |        | MAX. LOAD | MAX. THRUST |
|------|----------------------|--------|--------|-----------|-------------|
|      | Mx                   | My     | Mz     | Fy & Fz   | THRUST      |
|      | in-lbs               | in-lbs | in-lbs | lbf       | lbf         |
| 16   | 39                   | 339    | 339    | 217       | 38          |
| 25   | 126                  | 502    | 377    | 449       | 151         |
| 32   | 226                  | 1,344  | 1,344  | 569       | 209         |
| 40   | 604                  | 1,913  | 1,913  | 736       | 250         |
| 50   | 811                  | 3,483  | 3,483  | 1,014     | 325         |
| 63   | 1,019                | 5,339  | 5,339  | 1,292     | 418         |

### AUXILIARY CARRIER

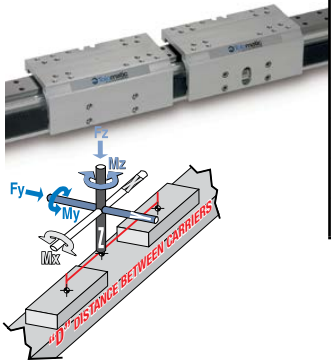

| SIZE | "D" MIN. | MAX. BENDING MOMENTS |       |       | MAX. LOAD |
|------|----------|----------------------|-------|-------|-----------|
|      |          | Mxa                  | Mya   | Mza   | Fya & Fza |
|      |          | mm                   | N-m   | N-m   | N-m       |
| 16   | 127      | 8.9                  | 70.0  | 70.0  | 1,932     |
| 25   | 152      | 28.5                 | 182   | 182   | 3,993     |
| 32   | 178      | 51.1                 | 249   | 249   | 5,063     |
| 40   | 216      | 136.0                | 407   | 407   | 6,549     |
| 50   | 218      | 183.0                | 561   | 561   | 9,020     |
| 63   | 330      | 230.0                | 1,074 | 1,074 | 11,490    |


| SIZE | "D" MIN. | MAX. BENDING MOMENTS |        |        | MAX. LOAD |
|------|----------|----------------------|--------|--------|-----------|
|      |          | Mxa                  | Mya    | Mza    | Fya & Fza |
|      |          | in                   | in-lbs | in-lbs | in-lbs    |
| 16   | 5.0      | 79                   | 620    | 620    | 434       |
| 25   | 6.0      | 252                  | 1,610  | 1,610  | 898       |
| 32   | 7.0      | 453                  | 2,202  | 2,202  | 1,138     |
| 40   | 8.5      | 1,208                | 3,601  | 3,601  | 1,472     |
| 50   | 8.6      | 1,623                | 4,966  | 4,966  | 2,028     |
| 63   | 13.0     | 2,038                | 9,508  | 9,508  | 2,583     |

\*At minimum "D" distance - see graph below for bending moments at greater distances

### AUXILIARY CARRIER BENDING MOMENTS WITH INCREASED "D" DISTANCE BETWEEN CARRIERS

Ratings were calculated with the following conditions:

- 1.) Coupling between carriers is rigid.
- 2.) Load is equally distributed between carriers.
- 3.) Coupling device applies no misalignment loads to carriers.

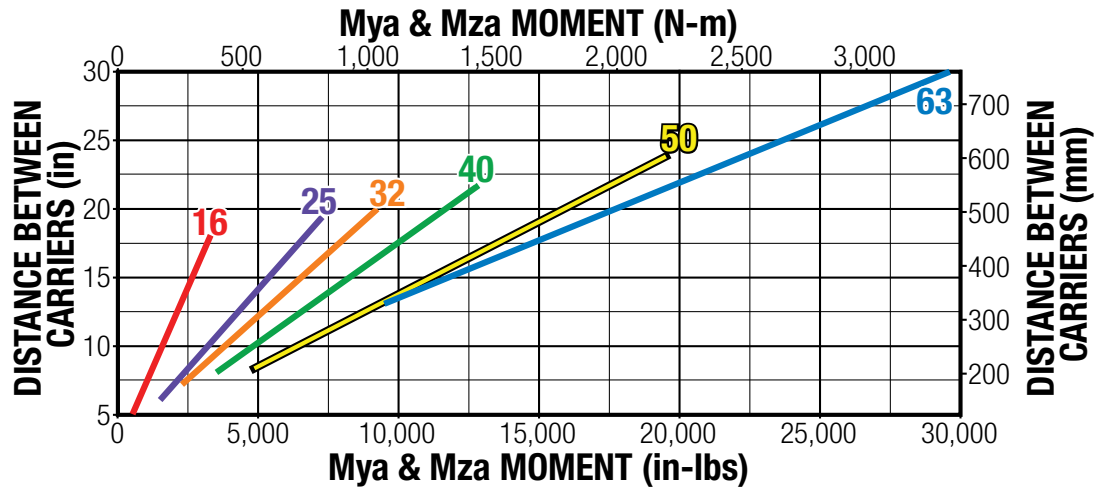

⚠ The above ratings are the maximum values for shock-free, vibration-free operation in a typical industrial environment, which must not be exceeded even in dynamic operation. Contact Tolomatic for assistance in selecting the most appropriate actuator for your application.

The moment and load capacity of the actuator bearing system is based on an L10 life of 5,000 linear km (2x10<sup>9</sup> in) of travel. Life of the actuator will vary for each application depending on the combined loads, motion parameters and operating conditions. The load factor (L<sub>F</sub>) for each application must not exceed a value of 1, as calculated below. Exceeding a load factor of 1 will diminish the actuator rated life.

$$L_F = \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} + \frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} \leq 1$$

With combined loads, L<sub>F</sub> must not exceed the value 1.





## LOAD DEFLECTION



DEFLECTION TESTING WAS DONE UNDER THESE CRITERIA:

- 1.) Actuator was properly mounted with distance between mounting plates within recommendations
- 2.) Deflection was measured at 12" from center of carrier as shown (see Mounting Plate Requirements page me\_11)



### DEFLECTION ABOUT X AXIS

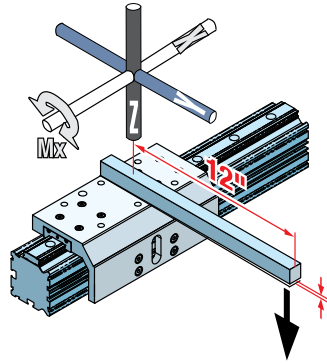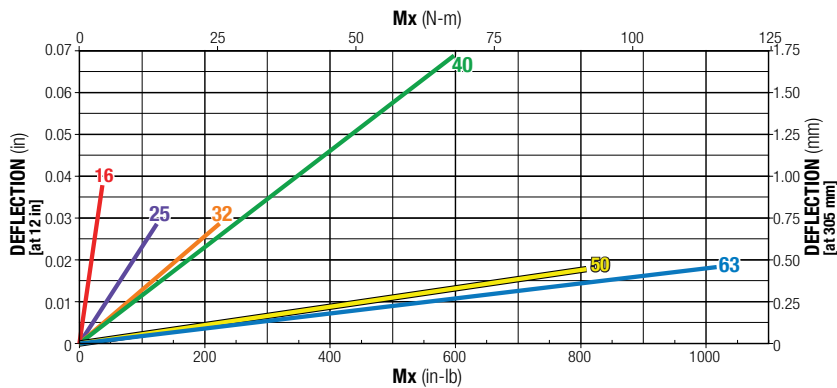

### DEFLECTION ABOUT Y AXIS

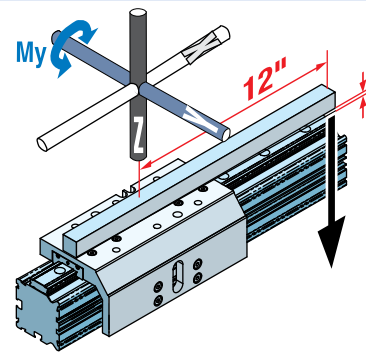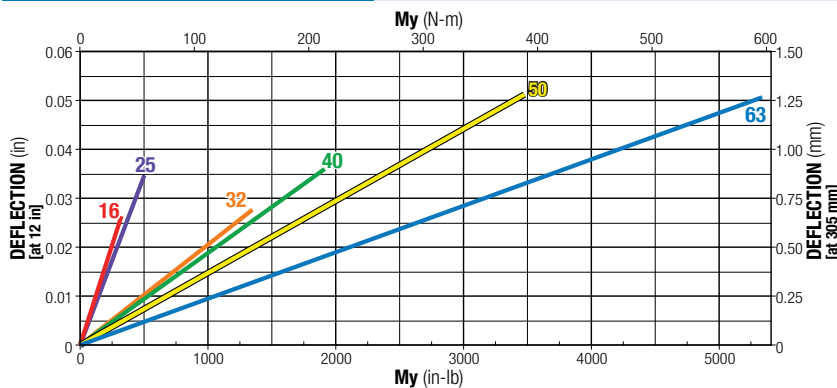


### DEFLECTION ABOUT Z AXIS

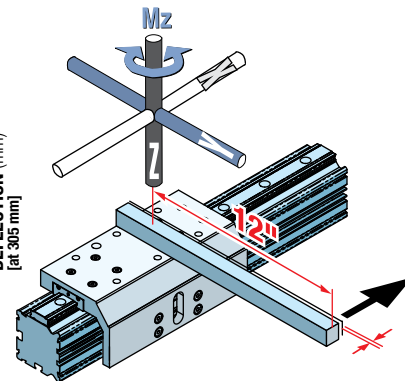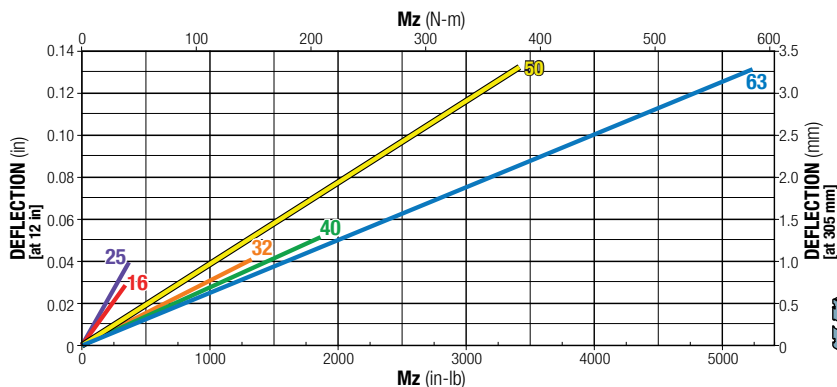

### SPEED FACTOR

FOR APPLICATIONS WITH HIGH SPEED OR SIGNIFICANT SHOCK AND VIBRATION:

Calculated values of loads and bending moments must be increased by speed factor from the graph at right to obtain full rated life of profiled rail bearing system.

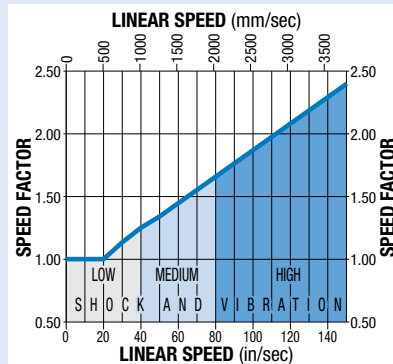

### PROFILLED RAIL LUBRICATION

Proper lubrication of profiled rail bearing system is essential for normal operation and achievement of full rated life of MX-P actuators. Lubrication should be performed at intervals of 101 km (4x10<sup>6</sup> in) of travel or once every year, whichever occurs first. **However, operating conditions such as high speed or significant shock and vibration may require more frequent lubrication.** Please consult Tolomatic for recommendations.

#### Recommended grease types:

1. Refined mineral oil-based multi-purpose grease with lithium thickening agent.
2. High-grade synthetic oil-based grease with urea thickening agent.



# MXB-U Rodless Belt Drive Actuator

## ACTUATOR & OPTION DIMENSIONS

3D CAD available at [www.tolomatic.com](http://www.tolomatic.com)

Always use configured CAD solid model to determine critical dimensions



|       | MXB16  | MXB25  | MXB32   | MXB40   | MXB50   | MXB63   |
|-------|--------|--------|---------|---------|---------|---------|
| A     | 135.3  | 173.9  | 187.8   | 216.6   | 224.7   | 275.1   |
| B     | 119.0  | 139.3  | 154.7   | 192.7   | 205.0   | 262.1   |
| C     | 50.8   | 58.0   | 55.9    | 78.7    | 82.6    | 96.1    |
| D     | 25.4   | 29.0   | 25.4    | 39.4    | 40.0    | 45.3    |
| E     | 3.8    | 4.4    | 4.4     | 4.4     | 4.4     | 4.4     |
| F     | 52.8   | 66.0   | 77.5    | 93.8    | 110.6   | 139.3   |
| G*    | 45.3   | 61.9   | 77.4    | 88.3    | 109.6   | 135.5   |
| H     | 44.5   | 50.8   | 69.9    | 82.6    | 98.4    | 111.1   |
| (LM)J | 15.0   | 57.7   | 57.7    | 47.5    | 47.5    | 47.5    |
| (RP)J | 46.6   | 57.7   | 57.7    | 47.5    | 47.5    | 47.5    |
| K     | Ø9.53  | Ø12.70 | Ø12.70  | Ø12.70  | Ø12.70  | Ø12.70  |
| L     | 26.4   | 29.2   | 27.9    | 39.7    | 41.5    | 52.2    |
| N     | 34.9   | 54.0   | 63.5    | 88.9    | 95.3    | 114.3   |
| O     | 110.0  | 135.0  | 170.0   | 200.0   | 216.0   | 304.8   |
| P     | 40.0   | 40.0   | 27.1    | 25.4    | 25.4    | 40.0    |
| Q     | -      | -      | 87.7    | 114.3   | 69.8    | 130.0   |
| S     | 28.0   | 40.0   | 50.0    | 72.0    | 79.4    | 98.3    |
| T     | M4x0.7 | M6x1.0 | M8x1.25 | M8x1.25 | M8x1.25 | M10x1.5 |
| U*    | 17.5   | 27.0   | 31.8    | 44.5    | 47.7    | 57.2    |
| V     | 30.00  | 42.00  | 55.37   | 64.00   | 78.74   | 100.00  |

### OPTIONAL MOUNTING PLATES

|    |                                 |                                 |                                  |                  |                  |                  |
|----|---------------------------------|---------------------------------|----------------------------------|------------------|------------------|------------------|
| AA | 15.9                            | 15.9                            | 19.1                             | 25.4             | 31.8             | 25.4             |
| BB | 6.4                             | 6.4                             | 7.6                              | -                | -                | -                |
| CC | 68.7                            | 81.9                            | 96.5                             | 119.4            | 119.4            | 164.6            |
| DD | 60.9                            | 77.7                            | 95.2                             | 106.1            | 127.4            | 161.0            |
| EE | 60.0                            | 63.5                            | 86.4                             | 127.0            | 142.2            | 203.2            |
| FF | 44.5                            | 50.8                            | 59.9                             | 112.0            | 127.0            | 177.8            |
| GG | 25.4                            | 25.4                            | 25.4                             | 20.1             | 20.1             | 25.4             |
| HH | Ø5.6 THRU<br>└┘Ø9.4<br>▽5.6 (2) | Ø5.6 THRU<br>└┘Ø9.4<br>▽5.6 (2) | Ø7.1 THRU<br>└┘Ø11.2<br>▽7.1 (2) | Ø7.1<br>THRU (2) | Ø7.1<br>THRU (2) | Ø7.1<br>THRU (2) |

Dimensions in millimeters

|       | MXB16    | MXB25     | MXB32      | MXB40      | MXB50      | MXB63     |
|-------|----------|-----------|------------|------------|------------|-----------|
| A     | 5.33     | 6.85      | 7.39       | 8.53       | 8.85       | 10.83     |
| B     | 4.69     | 5.49      | 6.09       | 7.59       | 8.07       | 10.33     |
| C     | 2.00     | 2.28      | 2.20       | 3.10       | 3.25       | 3.79      |
| D     | 1.00     | 1.14      | 1.00       | 1.55       | 1.58       | 1.79      |
| E     | 0.15     | 0.17      | 0.17       | 0.17       | 0.17       | 0.17      |
| F     | 2.08     | 2.60      | 3.05       | 3.69       | 4.35       | 5.48      |
| G*    | 1.77     | 2.44      | 3.05       | 3.48       | 4.31       | 5.34      |
| H     | 1.75     | 2.00      | 2.75       | 3.25       | 3.88       | 4.38      |
| (LM)J | 0.59     | 2.27      | 2.27       | 1.87       | 1.87       | 1.87      |
| (RP)J | 1.83     | 2.27      | 2.27       | 1.87       | 1.87       | 1.87      |
| K     | Ø0.375   | Ø0.500    | Ø0.500     | Ø0.500     | Ø0.500     | Ø0.500    |
| L     | 1.04     | 1.15      | 1.10       | 1.56       | 1.63       | 2.06      |
| N     | 1.38     | 2.13      | 2.50       | 3.50       | 3.75       | 4.50      |
| O     | 4.33     | 5.31      | 6.69       | 7.87       | 8.50       | 12.00     |
| P     | 1.57     | 1.57      | 1.07       | 1.00       | 1.00       | 1.57      |
| Q     | -        | -         | 3.37       | 4.50       | 2.75       | 5.12      |
| S     | 1.10     | 1.57      | 1.97       | 2.83       | 3.13       | 3.87      |
| T     | #8-32(6) | 1/4-20(6) | 5/16-18(8) | 5/16-18(8) | 5/16-18(8) | 3/8-16(8) |
| U*    | 0.69     | 1.07      | 1.25       | 1.75       | 1.88       | 2.25      |
| V     | 1.18     | 1.65      | 2.18       | 2.52       | 3.10       | 3.94      |

### OPTIONAL MOUNTING PLATES


|    |                                   |                                   |                                   |                   |                   |                   |
|----|-----------------------------------|-----------------------------------|-----------------------------------|-------------------|-------------------|-------------------|
| AA | 0.63                              | 0.63                              | 0.75                              | 1.00              | 1.25              | 1.00              |
| BB | 0.25                              | 0.25                              | 0.30                              | -                 | -                 | -                 |
| CC | 2.71                              | 3.22                              | 3.80                              | 4.70              | 5.60              | 6.48              |
| DD | 2.4                               | 3.06                              | 3.75                              | 4.18              | 5.01              | 6.34              |
| EE | 2.36                              | 2.50                              | 3.40                              | 5.00              | 5.60              | 8.00              |
| FF | 1.75                              | 2.00                              | 2.75                              | 4.41              | 5.00              | 7.00              |
| GG | 1.00                              | 1.00                              | 1.00                              | 0.79              | 0.79              | 1.00              |
| HH | Ø0.22 THRU<br>└┘Ø0.37<br>▽.22 (2) | Ø0.22 THRU<br>└┘Ø0.37<br>▽.22 (2) | Ø0.28 THRU<br>└┘Ø0.44<br>▽.28 (2) | Ø0.28<br>THRU (2) | Ø0.28<br>THRU (2) | Ø0.28<br>THRU (2) |

Dimensions in inches

### OPTIONAL TUBE CLAMPS

|    | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|-------|-------|-------|-------|-------|-------|
| JJ | -     | 57.0  | 74.1  | 82.7  | 97.5  | 131.7 |
| KK | -     | 69.0  | 87.4  | 96.7  | 111.5 | 150.7 |
| LL | -     | 18.0  | 16.0  | 14.0  | 14.0  | 19.0  |
| MM | -     | 3.6   | 4.3   | 3.8   | 3.8   | 6.1   |
| NN | -     | 5.2   | 7.1   | 7.1   | 7.1   | 10.7  |

Dimensions in millimeters

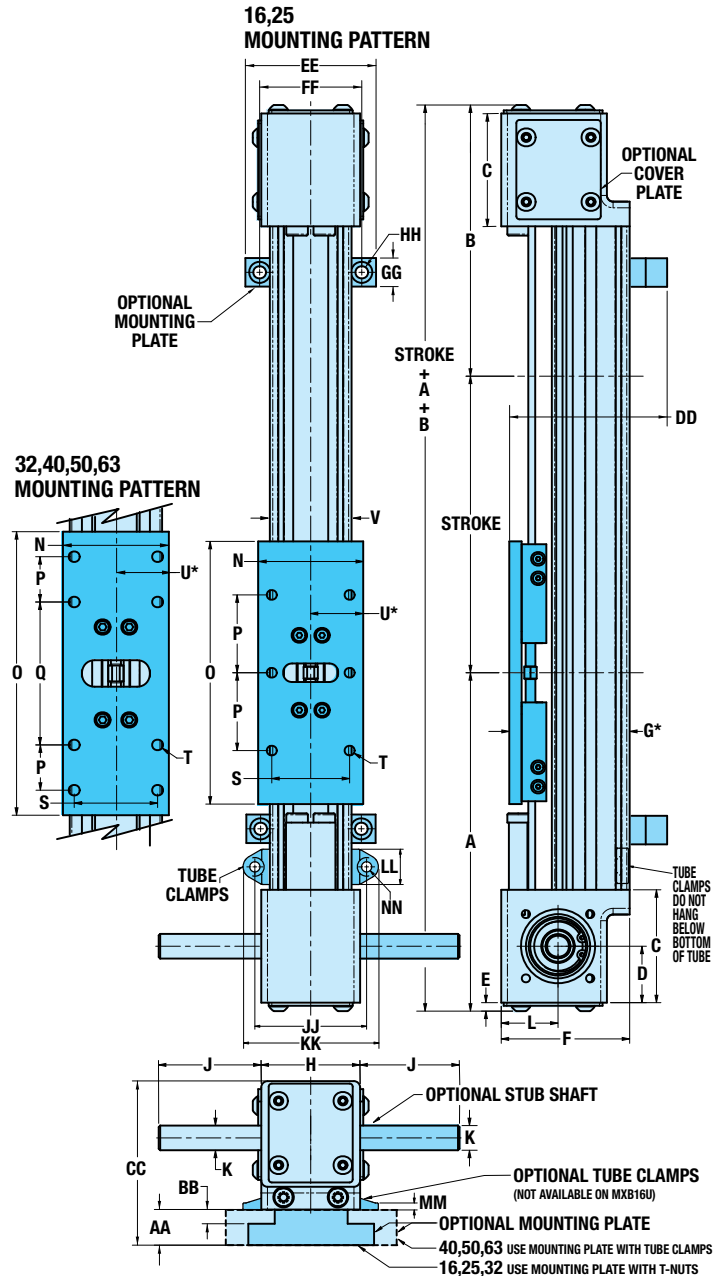


**A** \*In order for the actuator to operate properly, dimensions "G" and "U" must not vary more than 0.51mm [ $\pm 0.020$  in] over the entire length of the stroke.

|    | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|-------|-------|-------|-------|-------|-------|
| JJ | -     | 2.24  | 2.92  | 3.26  | 3.84  | 5.19  |
| KK | -     | 2.72  | 3.44  | 3.81  | 4.39  | 5.93  |
| LL | -     | 0.71  | 0.63  | 0.55  | 0.55  | 0.75  |
| MM | -     | 0.14  | 0.17  | 0.15  | 0.15  | 0.24  |
| NN | -     | 0.20  | 0.28  | 0.28  | 0.28  | 0.42  |

Dimensions in inches

# MXB-S Rodless Belt Drive Actuator

## SOLID BEARING DIMENSIONS

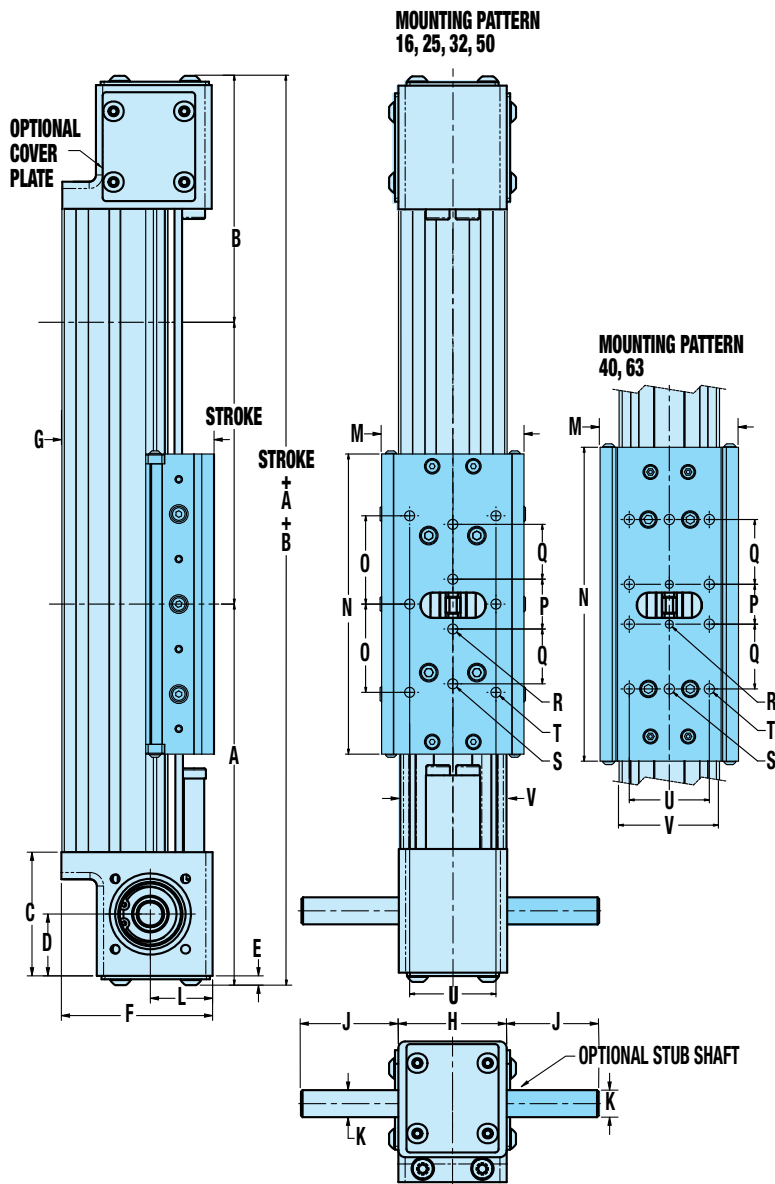

|         | MXB16         | MXB25         | MXB32          | MXB40          | MXB50          | MXB63          |
|---------|---------------|---------------|----------------|----------------|----------------|----------------|
| A       | 135.3         | 173.9         | 179.3          | 216.6          | 217.8          | 275.1          |
| B       | 119.0         | 139.3         | 163.2          | 192.7          | 212.0          | 262.1          |
| C       | 50.8          | 58.0          | 55.9           | 78.7           | 82.6           | 96.1           |
| D       | 25.4          | 29.0          | 25.4           | 39.4           | 40.0           | 45.3           |
| E       | 3.8           | 4.4           | 4.4            | 4.4            | 4.4            | 4.4            |
| F       | 52.8          | 66.0          | 77.5           | 93.8           | 110.6          | 139.3          |
| G*      | 45.8          | 58.4          | 77.8           | 89.2           | 112.8          | 139.7          |
| H       | 44.5          | 50.8          | 69.9           | 82.6           | 98.4           | 111.1          |
| (LMI) J | 15.0          | 57.7          | 57.7           | 47.5           | 47.5           | 47.5           |
| (RP) J  | 46.6          | 57.7          | 57.7           | 47.5           | 47.5           | 47.5           |
| K       | Ø9.53         | Ø12.70        | Ø12.70         | Ø12.70         | Ø12.70         | Ø12.70         |
| L       | 26.4          | 29.2          | 27.9           | 39.7           | 41.5           | 52.2           |
| M       | 40.1          | 55.4          | 72.6           | 88.2           | 104.1          | 142            |
| N       | 110.0         | 134.9         | 153            | 200            | 200.9          | 307.6          |
| O       | 30            | 39.9          | 45             | -              | 47.8           | -              |
| P       | -             | 25.4          | 25.4           | 25.4           | 63.5           | 76.2           |
| Q       | -             | 27.2          | 28             | 41.3           | 31.8           | 38.1           |
| R       | -             | M6x1.0<br>(2) | M8x1.25<br>(2) | M8x1.25<br>(2) | M10x1.5<br>(2) | M10x1.5<br>(2) |
| S       | -             | M6x1.0<br>(2) | M8x1.25<br>(2) | M8x1.25<br>(2) | M10x1.5<br>(2) | M10x1.5<br>(2) |
| T       | M4x0.7<br>(6) | M6x1.0<br>(6) | M8x1.25<br>(6) | M8x1.25<br>(8) | M10x1.5<br>(6) | M10x1.5<br>(8) |
| U*      | 30.0          | 30.0          | 44.0           | 51.0           | 65.8           | 82.6           |
| V       | 30.00         | 42.00         | 55.37          | 64.00          | 78.74          | 100.00         |

Dimensions in millimeters

|         | MXB16     | MXB25         | MXB32         | MXB40          | MXB50         | MXB63         |
|---------|-----------|---------------|---------------|----------------|---------------|---------------|
| A       | 5.33      | 6.85          | 7.06          | 8.53           | 8.57          | 10.83         |
| B       | 4.69      | 5.49          | 6.43          | 7.59           | 8.34          | 10.33         |
| C       | 2.00      | 2.28          | 2.20          | 3.10           | 3.25          | 3.79          |
| D       | 1.00      | 1.14          | 1.00          | 1.55           | 1.58          | 1.79          |
| E       | 0.15      | 0.17          | 0.17          | 0.17           | 0.17          | 0.17          |
| F       | 2.08      | 2.60          | 3.05          | 3.69           | 4.35          | 5.48          |
| G*      | 1.80      | 2.30          | 3.06          | 3.51           | 4.44          | 5.50          |
| H       | 1.75      | 2.00          | 2.75          | 3.25           | 3.88          | 4.38          |
| (LMI) J | 0.59      | 2.27          | 2.27          | 1.87           | 1.87          | 1.87          |
| (RP) J  | 1.83      | 2.27          | 2.27          | 1.87           | 1.87          | 1.87          |
| K       | Ø0.375    | Ø0.500        | Ø0.500        | Ø0.500         | Ø0.500        | Ø0.500        |
| L       | 1.04      | 1.15          | 1.10          | 1.56           | 1.63          | 2.06          |
| M       | 1.58      | 2.18          | 2.86          | 3.47           | 4.1           | 5.59          |
| N       | 4.33      | 5.31          | 6.02          | 7.87           | 7.91          | 12.11         |
| O       | 1.18      | 1.57          | 1.77          | -              | 1.88          | -             |
| P       | -         | 1.00          | 1.00          | 1.00           | 2.50          | 3.00          |
| Q       | -         | 1.07          | 1.10          | 1.63           | 1.25          | 1.50          |
| R       | -         | 1/4-20<br>(2) | 1/4-20<br>(2) | 1/4-20<br>(2)  | 3/8-16<br>(2) | 3/8-16<br>(2) |
| S       | -         | #10-32<br>(2) | 1/4-20<br>(2) | 5/16-18<br>(2) | 3/8-16<br>(2) | 3/8-16<br>(2) |
| T       | #8-32 (6) | 1/4-20<br>(6) | 1/4-20<br>(6) | 5/16-18<br>(8) | 3/8-16<br>(6) | 3/8-16<br>(8) |
| U*      | 1.18      | 1.18          | 1.73          | 2.00           | 2.59          | 3.25          |
| V       | 1.18      | 1.65          | 2.18          | 2.52           | 3.10          | 3.94          |

Dimensions in inches


# MXB-S Rodless Belt Drive Actuator

3D CAD available at [www.tolomatic.com](http://www.tolomatic.com)

Always use configured CAD solid model to determine critical dimensions



## SOLID BEARING OPTION DIMENSIONS

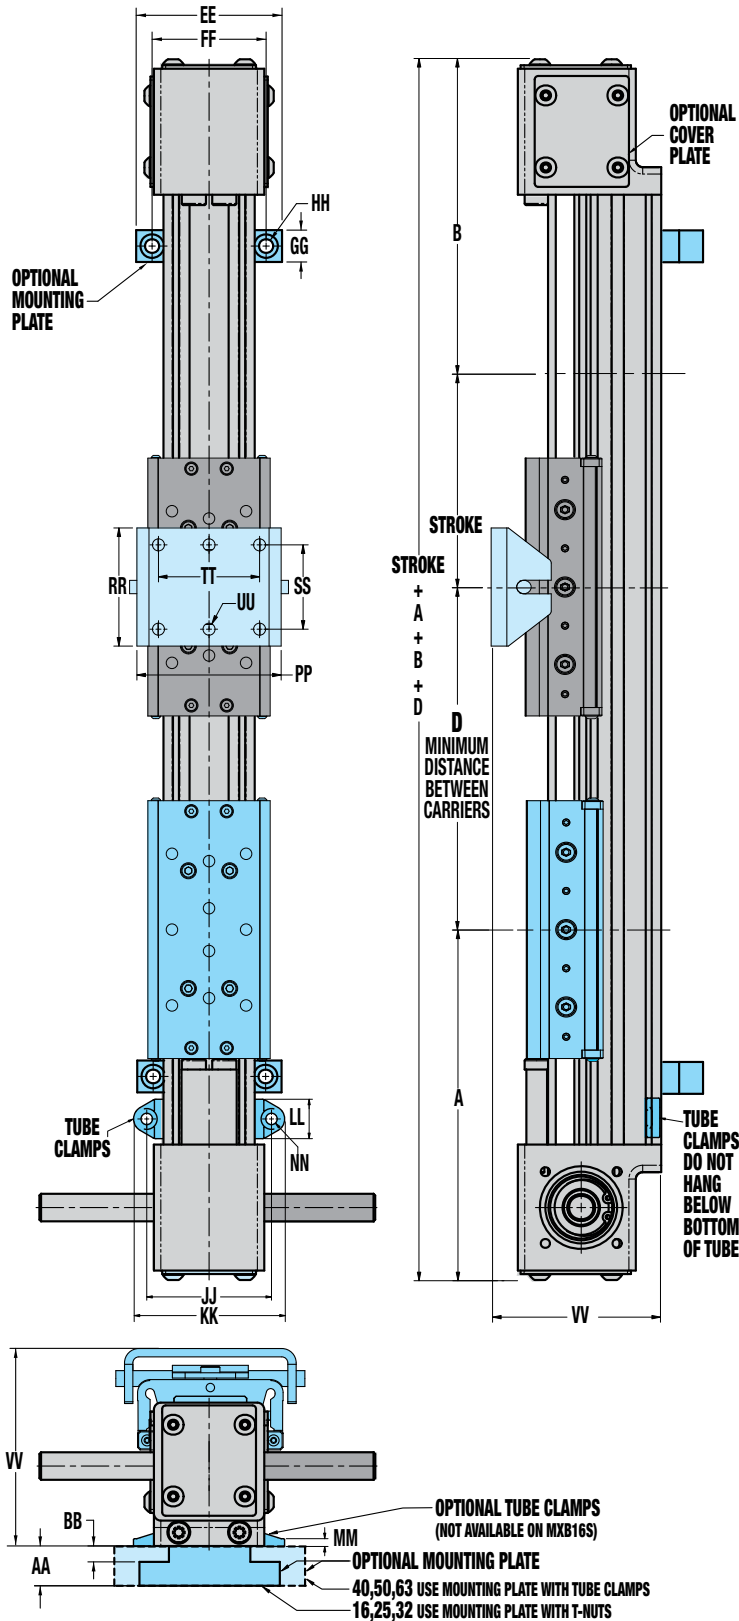

|   | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|---|-------|-------|-------|-------|-------|-------|
| A | 135.3 | 173.9 | 179.3 | 216.6 | 217.8 | 275.1 |
| B | 119.0 | 139.3 | 163.2 | 192.7 | 212.0 | 262.1 |
| D | 127.0 | 152.4 | 177.0 | 215.9 | 216.4 | 330.2 |

### OPTIONAL MOUNTING PLATES

|    | MXB16                           | MXB25                           | MXB32                           | MXB40            | MXB50            | MXB63            |
|----|---------------------------------|---------------------------------|---------------------------------|------------------|------------------|------------------|
| AA | 15.9                            | 15.9                            | 19.1                            | 25.4             | 31.8             | 25.4             |
| BB | 6.4                             | 6.4                             | 7.6                             | -                | -                | -                |
| DD | 60.9                            | 77.7                            | 95.2                            | 106.1            | 127.4            | 153.3            |
| EE | 60.0                            | 63.5                            | 86.4                            | 127.0            | 142.2            | 203.2            |
| FF | 44.5                            | 50.8                            | 59.9                            | 112.0            | 127.0            | 177.8            |
| GG | 25.4                            | 25.4                            | 25.4                            | 20.1             | 20.1             | 25.4             |
| HH | Ø5.6 THRU<br>└┘09.4<br>▽5.6 (2) | Ø5.6 THRU<br>└┘09.4<br>▽5.6 (2) | Ø7.1 THRU<br>└┘11.2<br>▽7.1 (2) | Ø7.1 THRU<br>(2) | Ø7.1 THRU<br>(2) | Ø7.1 THRU<br>(2) |

### OPTIONAL TUBE CLAMPS

|    | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|-------|-------|-------|-------|-------|-------|
| JJ | -     | 57.0  | 74.1  | 82.7  | 97.5  | 131.7 |
| KK | -     | 69.0  | 87.4  | 96.7  | 111.5 | 150.7 |
| LL | -     | 18.0  | 16.0  | 14.0  | 14.0  | 19.0  |
| MM | -     | 3.6   | 4.3   | 3.8   | 3.8   | 6.1   |
| NN | -     | 5.2   | 7.1   | 7.1   | 7.1   | 10.7  |

### OPTIONAL FLOATING MOUNT

|    | MXB16    | MXB25    | MXB32    | MXB40    | MXB50    | MXB63    |
|----|----------|----------|----------|----------|----------|----------|
| PP | 47.2     | 64.1     | 93.3     | 109.7    | 128.0    | 154.9    |
| RR | 24.9     | 31.8     | 70.1     | 100.0    | 100.0    | 127.0    |
| SS | 11.9     | 15.9     | 50.0     | 74.9     | 80.0     | 100.1    |
| TT | -        | -        | -        | 55.1     | -        | 70.1     |
| UU | Ø4.6 (2) | Ø6.1 (2) | Ø7.1 (2) | Ø7.1 (4) | Ø9.1 (2) | Ø8.6 (4) |
| VV | 58.5     | 70.9     | 93.3     | 108.2    | 133.1    | 156.8    |

Dimensions in millimeters

|   | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|---|-------|-------|-------|-------|-------|-------|
| A | 5.33  | 6.85  | 7.06  | 8.53  | 8.57  | 10.83 |
| B | 4.69  | 5.49  | 6.43  | 7.59  | 8.34  | 10.33 |
| D | 5.00  | 6.00  | 7.00  | 8.50  | 8.60  | 13.00 |

### OPTIONAL MOUNTING PLATES

|    | MXB16                           | MXB25                           | MXB32                           | MXB40            | MXB50            | MXB63            |
|----|---------------------------------|---------------------------------|---------------------------------|------------------|------------------|------------------|
| AA | 0.63                            | 0.63                            | 0.75                            | 1.00             | 1.25             | 1.00             |
| BB | 0.25                            | 0.25                            | 0.30                            | -                | -                | -                |
| DD | 2.4                             | 3.06                            | 3.75                            | 4.18             | 5.01             | 6.04             |
| EE | 2.36                            | 2.50                            | 3.40                            | 5.00             | 5.60             | 8.00             |
| FF | 1.75                            | 2.00                            | 2.75                            | 4.41             | 5.00             | 7.00             |
| GG | 1.00                            | 1.00                            | 1.00                            | 0.79             | 0.79             | 1.00             |
| HH | Ø.22 THRU<br>└┘0.37<br>▽.22 (2) | Ø.22 THRU<br>└┘0.37<br>▽.22 (2) | Ø.28 THRU<br>└┘0.44<br>▽.28 (2) | Ø.28 THRU<br>(2) | Ø.28 THRU<br>(2) | Ø.28 THRU<br>(2) |

### OPTIONAL TUBE CLAMPS

|    | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|-------|-------|-------|-------|-------|-------|
| JJ | -     | 2.24  | 2.92  | 3.26  | 3.84  | 5.19  |
| KK | -     | 2.72  | 3.44  | 3.81  | 4.39  | 5.93  |
| LL | -     | 0.71  | 0.63  | 0.55  | 0.55  | 0.75  |
| MM | -     | 0.14  | 0.17  | 0.15  | 0.15  | 0.24  |
| NN | -     | 0.20  | 0.28  | 0.28  | 0.28  | 0.42  |

### OPTIONAL FLOATING MOUNT


|    | MXB16    | MXB25    | MXB32    | MXB40    | MXB50    | MXB63    |
|----|----------|----------|----------|----------|----------|----------|
| PP | 1.86     | 2.52     | 3.37     | 4.32     | 5.04     | 6.10     |
| RR | 0.98     | 1.25     | 2.76     | 3.94     | 3.94     | 5.00     |
| SS | 0.47     | 0.63     | 1.97     | 2.95     | 3.15     | 3.94     |
| TT | -        | -        | -        | 2.17     | -        | 2.76     |
| UU | Ø.18 (2) | Ø.24 (2) | Ø.28 (2) | Ø.28 (4) | Ø.36 (2) | Ø.34 (4) |
| VV | 2.30     | 2.79     | 3.67     | 4.26     | 5.24     | 6.18     |

Dimensions in inches



# MXB-P Rodless Belt Drive Actuator

## PROFILED RAIL BEARING DIMENSIONS

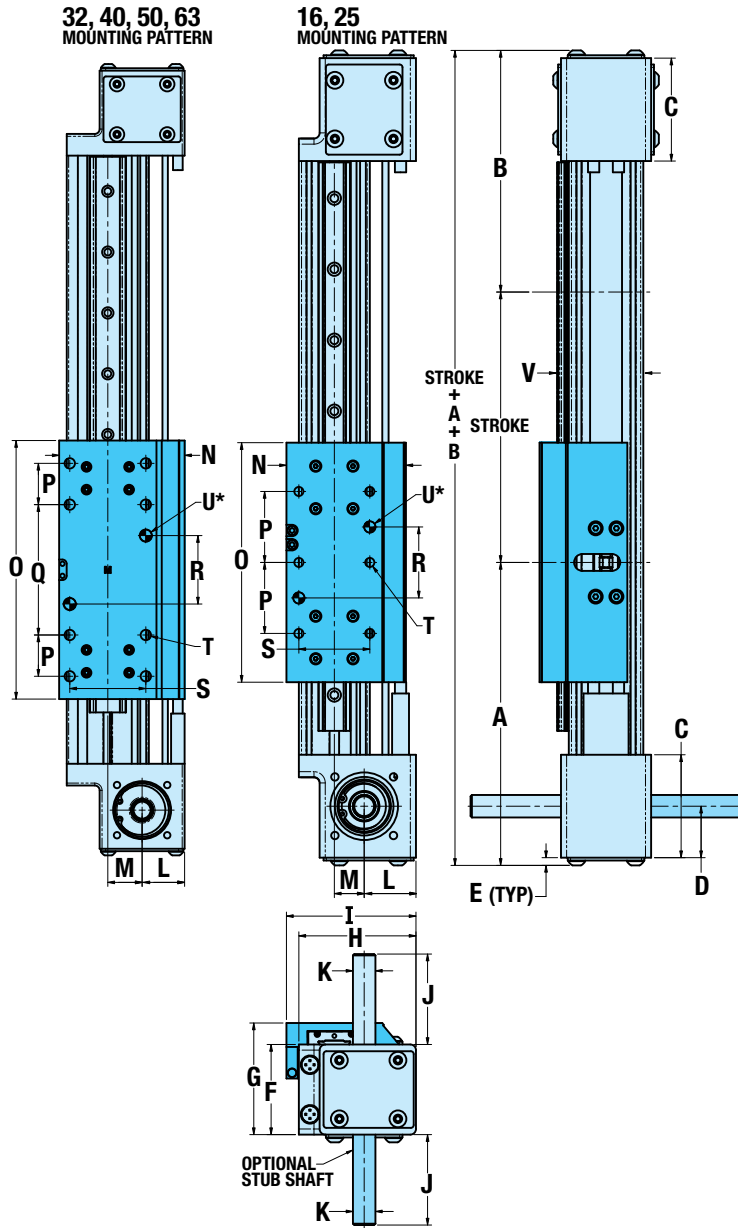

|       | MXB16                      | MXB25                      | MXB32                      | MXB40                       | MXB50                       | MXB63                         |
|-------|----------------------------|----------------------------|----------------------------|-----------------------------|-----------------------------|-------------------------------|
| A     | 135.3                      | 173.9                      | 187.8                      | 216.6                       | 224.7                       | 275.1                         |
| B     | 119.0                      | 139.3                      | 154.7                      | 192.7                       | 205.0                       | 262.1                         |
| C     | 50.8                       | 58.0                       | 55.9                       | 78.7                        | 82.6                        | 96.1                          |
| D     | 25.4                       | 29.0                       | 25.4                       | 39.4                        | 40.0                        | 45.3                          |
| E     | 3.8                        | 4.4                        | 4.4                        | 4.4                         | 4.4                         | 4.4                           |
| F     | 44.5                       | 50.8                       | 69.9                       | 82.6                        | 98.4                        | 111.1                         |
| G     | 53.2                       | 62.9                       | 84.6                       | 98.7                        | 129.6                       | 145.6                         |
| H     | 52.8                       | 66.0                       | 77.5                       | 93.8                        | 110.6                       | 139.3                         |
| I     | 54.8                       | 73.0                       | 82.5                       | 103.9                       | 117.9                       | 147.1                         |
| (LM)J | 15.0                       | 57.7                       | 57.7                       | 47.5                        | 47.5                        | 47.5                          |
| (RP)J | 46.6                       | 57.7                       | 57.7                       | 47.5                        | 47.5                        | 47.5                          |
| K     | Ø9.53                      | Ø12.70                     | Ø12.70                     | Ø12.70                      | Ø12.70                      | Ø12.70                        |
| L     | 26.4                       | 29.2                       | 27.9                       | 39.7                        | 41.5                        | 52.2                          |
| M     | 11.4                       | 16.8                       | 22.6                       | 22.2                        | 29.8                        | 37.1                          |
| N     | 45.3                       | 67.4                       | 82.5                       | 97.8                        | 117.4                       | 150.6                         |
| O     | 110.0                      | 135.0                      | 170.0                      | 200.0                       | 216.0                       | 304.8                         |
| P     | 40.0                       | 40.0                       | 27.1                       | 25.4                        | 25.4                        | 40.0                          |
| Q     | —                          | —                          | 85.7                       | 114.3                       | 69.8                        | 130.0                         |
| R     | 40.00                      | 40.00                      | 45.00                      | 63.50                       | 38.10                       | 65.00                         |
| S     | 28.00                      | 40.00                      | 50.00                      | 72.00                       | 79.38                       | 98.30                         |
| T     | M4x0.7                     | M6x1.0                     | M8x1.25                    | M8x1.25                     | M8x1.25                     | M10x1.5                       |
| U*    | Ø4.045 /<br>4.020<br>∇6.35 | Ø6.045 /<br>6.020<br>∇6.35 | Ø8.045 /<br>8.020<br>∇9.53 | Ø8.045 /<br>8.020<br>∇12.70 | Ø8.045 /<br>8.020<br>∇12.70 | Ø10.045 /<br>10.020<br>∇12.70 |
| V     | 35.50                      | 48.60                      | 62.87                      | 73.50                       | 93.74                       | 115.00                        |

Dimensions in millimeters

|       | MXB16                          | MXB25                          | MXB32                          | MXB40                          | MXB50                          | MXB63                          |
|-------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| A     | 5.33                           | 6.85                           | 7.39                           | 8.53                           | 8.85                           | 10.83                          |
| B     | 4.69                           | 5.49                           | 6.09                           | 7.59                           | 8.07                           | 10.33                          |
| C     | 2.00                           | 2.28                           | 2.20                           | 3.10                           | 3.25                           | 3.79                           |
| D     | 1.00                           | 1.14                           | 1.00                           | 1.55                           | 1.58                           | 1.79                           |
| E     | 0.15                           | 0.17                           | 0.17                           | 0.17                           | 0.17                           | 0.17                           |
| F     | 1.75                           | 2.00                           | 2.75                           | 3.25                           | 3.88                           | 4.38                           |
| G     | 2.10                           | 2.48                           | 3.33                           | 3.88                           | 5.10                           | 5.73                           |
| H     | 2.08                           | 2.60                           | 3.05                           | 3.69                           | 4.35                           | 5.48                           |
| I     | 2.16                           | 2.87                           | 3.25                           | 4.09                           | 4.64                           | 5.79                           |
| (LM)J | 0.59                           | 2.27                           | 2.27                           | 1.87                           | 1.87                           | 1.87                           |
| (RP)J | 1.83                           | 2.27                           | 2.27                           | 1.87                           | 1.87                           | 1.87                           |
| K     | Ø0.375                         | Ø0.500                         | Ø0.500                         | Ø0.500                         | Ø0.500                         | Ø0.500                         |
| L     | 1.04                           | 1.15                           | 1.10                           | 1.56                           | 1.63                           | 2.06                           |
| M     | 0.45                           | 0.66                           | 0.89                           | 0.87                           | 1.17                           | 1.46                           |
| N     | 1.78                           | 2.65                           | 3.25                           | 3.85                           | 4.62                           | 5.93                           |
| O     | 4.33                           | 5.31                           | 6.69                           | 7.87                           | 8.50                           | 12.00                          |
| P     | 1.57                           | 1.57                           | 1.07                           | 1.00                           | 1.00                           | 1.57                           |
| Q     | —                              | —                              | 3.37                           | 4.50                           | 2.75                           | 5.12                           |
| R     | 1.575                          | 1.575                          | 1.772                          | 2.500                          | 1.500                          | 2.559                          |
| S     | 1.102                          | 1.575                          | 1.969                          | 2.835                          | 3.125                          | 3.870                          |
| T     | #8-32(6)                       | 1/4-20(6)                      | 5/16-18(8)                     | 5/16-18(8)                     | 5/16-18(8)                     | 3/8-16(8)                      |
| U*    | Ø.1583 /<br>.1573 (2)<br>∇.250 | Ø.2520 /<br>.2510 (2)<br>∇.250 | Ø.3145 /<br>.3135 (2)<br>∇.375 | Ø.3145 /<br>.3135 (2)<br>∇.500 | Ø.3145 /<br>.3135 (2)<br>∇.500 | Ø.3770 /<br>.3760 (2)<br>∇.500 |
| V     | 1.40                           | 1.91                           | 2.48                           | 2.89                           | 3.69                           | 4.53                           |

Dimensions in inches

\*DOWEL HOLES

|   |              |
|---|--------------|
| ⊕ | 0.08 mm (M)  |
| ⊕ | 0.003 in (M) |


# MXB-P Rodless Belt Drive Actuator

3D CAD available at [www.tolomatic.com](http://www.tolomatic.com)

Always use configured CAD solid model to determine critical dimensions



## PROFILED RAIL BEARING OPTION DIMENSIONS

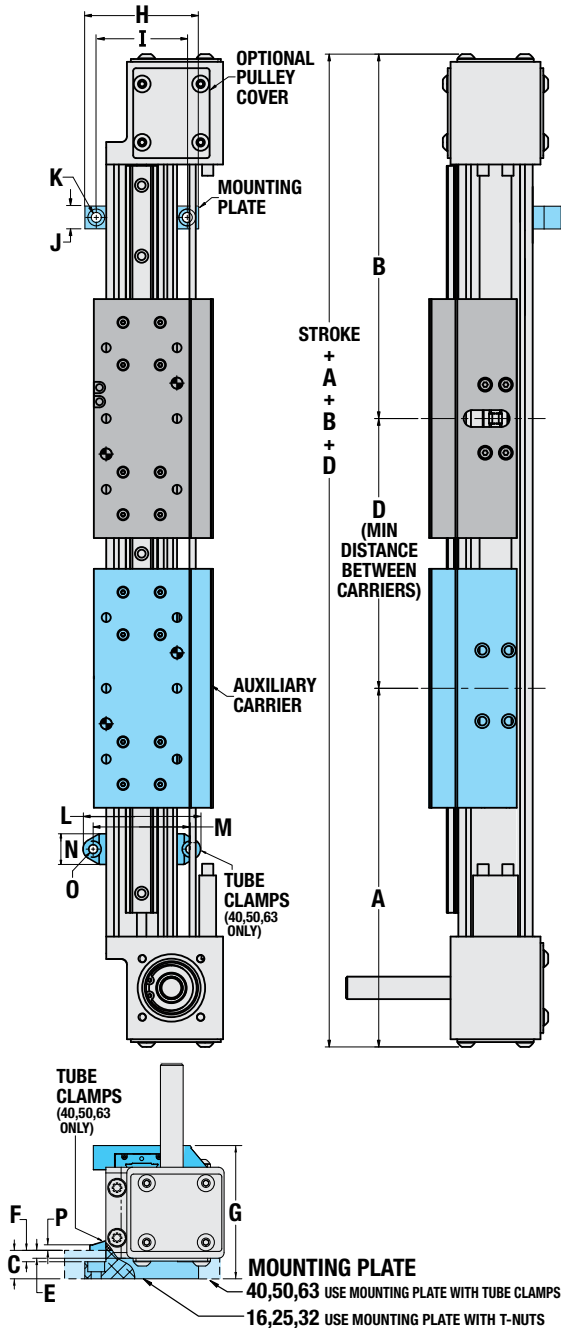

|                          | MXB16                           | MXB25                           | MXB32                           | MXB40         | MXB50         | MXB63         |
|--------------------------|---------------------------------|---------------------------------|---------------------------------|---------------|---------------|---------------|
| A                        | 135.3                           | 173.9                           | 187.8                           | 216.6         | 224.7         | 275.1         |
| B                        | 119.0                           | 139.3                           | 154.7                           | 192.7         | 205.0         | 262.1         |
| <b>AUXILIARY CARRIER</b> |                                 |                                 |                                 |               |               |               |
| D                        | 127.0                           | 152.4                           | 177.0                           | 215.9         | 216.4         | 330.2         |
| <b>MOUNTING PLATE</b>    |                                 |                                 |                                 |               |               |               |
| C                        | 15.9                            | 15.9                            | 19.1                            | 25.4          | 31.8          | 25.4          |
| E                        | 7.2                             | 4.4                             | 7.2                             | 9.3           | 9.8           | 5.6           |
| F                        | 6.4                             | 6.4                             | 7.6                             | —             | —             | —             |
| G                        | 61.9                            | 74.4                            | 96.5                            | 114.8         | 151.4         | 165.4         |
| H                        | 60.0                            | 63.5                            | 86.4                            | 127.0         | 142.2         | 203.2         |
| I                        | 44.5                            | 50.8                            | 69.9                            | 112.0         | 127.0         | 177.8         |
| J                        | 25.4                            | 25.4                            | 25.4                            | 20.1          | 20.1          | 25.4          |
| K                        | Ø5.6 THRU<br>└┘09.4<br>▽5.6 (2) | Ø5.6 THRU<br>└┘09.4<br>▽5.6 (2) | Ø7.1 THRU<br>└┘11.2<br>▽7.1 (2) | Ø7.1 THRU (2) | Ø7.1 THRU (2) | Ø7.1 THRU (2) |
| <b>TUBE CLAMPS</b>       |                                 |                                 |                                 |               |               |               |
| L                        | —                               | —                               | —                               | 96.8          | 111.5         | 150.6         |
| M                        | —                               | —                               | —                               | 82.8          | 97.5          | 131.8         |
| N                        | —                               | —                               | —                               | 14.0          | 14.0          | 19.1          |
| O                        | —                               | —                               | —                               | 7.1           | 7.1           | 10.7          |
| P                        | —                               | —                               | —                               | 3.8           | 3.8           | 6.1           |

Dimensions in millimeters


|                          | MXB16                           | MXB25                           | MXB32                           | MXB40         | MXB50         | MXB63         |
|--------------------------|---------------------------------|---------------------------------|---------------------------------|---------------|---------------|---------------|
| A                        | 5.33                            | 6.85                            | 7.39                            | 8.53          | 8.85          | 10.83         |
| B                        | 4.69                            | 5.49                            | 6.09                            | 7.59          | 8.07          | 10.33         |
| <b>AUXILIARY CARRIER</b> |                                 |                                 |                                 |               |               |               |
| D                        | 5.00                            | 6.00                            | 7.00                            | 8.50          | 8.60          | 13.00         |
| <b>MOUNTING PLATE</b>    |                                 |                                 |                                 |               |               |               |
| C                        | 0.63                            | 0.63                            | 0.75                            | 1.00          | 1.25          | 1.00          |
| E                        | 0.28                            | 0.17                            | 0.29                            | 0.37          | 0.39          | 0.22          |
| F                        | 0.25                            | 0.25                            | 0.30                            | —             | —             | —             |
| G                        | 2.44                            | 2.93                            | 3.80                            | 4.52          | 5.96          | 6.51          |
| H                        | 2.36                            | 2.50                            | 3.40                            | 5.00          | 5.60          | 8.00          |
| I                        | 1.75                            | 2.00                            | 2.75                            | 4.41          | 5.00          | 7.00          |
| J                        | 1.00                            | 1.00                            | 1.00                            | 0.79          | 0.79          | 1.00          |
| K                        | Ø.22 THRU<br>└┘0.37<br>▽.22 (2) | Ø.22 THRU<br>└┘0.37<br>▽.22 (2) | Ø.28 THRU<br>└┘0.44<br>▽.28 (2) | Ø.28 THRU (2) | Ø.28 THRU (2) | Ø.28 THRU (2) |
| <b>TUBE CLAMPS</b>       |                                 |                                 |                                 |               |               |               |
| L                        | —                               | —                               | —                               | 3.81          | 4.39          | 5.93          |
| M                        | —                               | —                               | —                               | 3.26          | 3.84          | 5.19          |
| N                        | —                               | —                               | —                               | 0.55          | 0.55          | 0.75          |
| O                        | —                               | —                               | —                               | 0.28          | 0.28          | 0.42          |
| P                        | —                               | —                               | —                               | 0.15          | 0.15          | 0.24          |

Dimensions in inches


# MXB Rodless Belt Drive Actuator

## DIRECT DRIVE MOTOR MOUNTING


### MXB-U

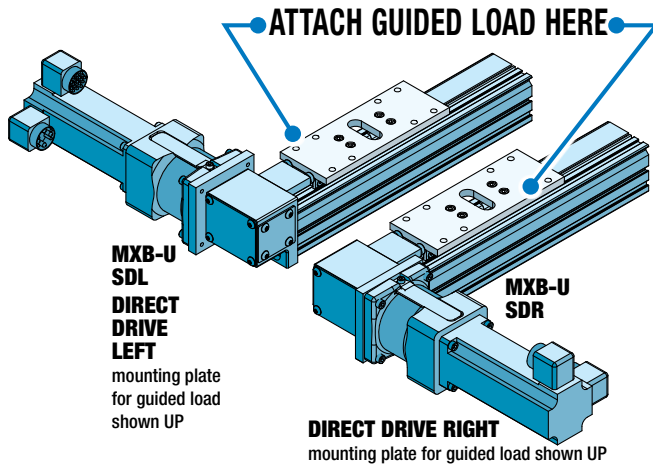

### MXB-S

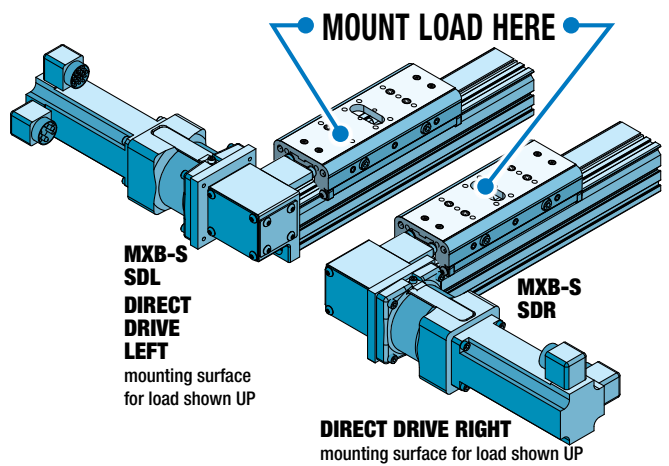

### MXB-P

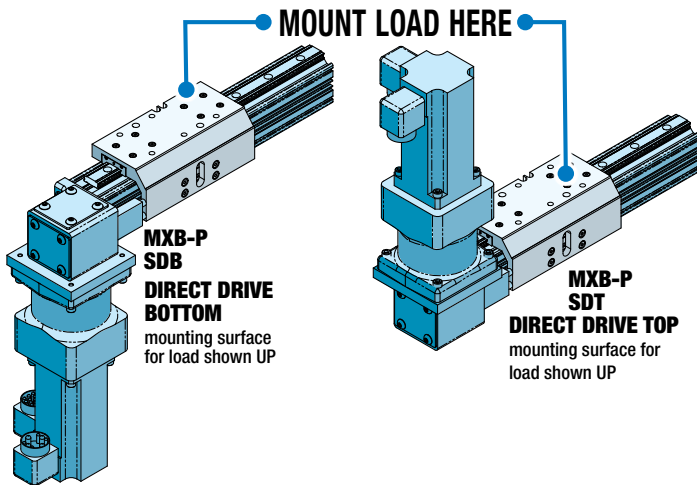

### MOTOR MOUNTING

The MXB-P is unique among Tolomatic belt drive actuators. The mounting surface of the carrier is located 90° from the motion of the belt. The side opposite the belt is reserved for switch placement. The bottom of the actuator is reserved for mounting. If the motor is mounted in the SDT (direct drive top orientation), be sure the load mounted to the carrier does not interfere with the motor.



**LARGE FRAME MOTORS AND SMALLER SIZE ACTUATORS:** Cantilevered motors need to be supported if subjected to continuous rapid reversing duty and/or under dynamic conditions.


# MXB Rodless Belt Drive Actuator

3D CAD available at [www.tolomatic.com](http://www.tolomatic.com)  
Always use configured CAD solid model  
to determine critical dimensions




## REDUCTION DRIVE MOTOR MOUNTING


### MXB-U




**REDUCTION DRIVE  
BOTTOM LEFT (SDBL)**  
mounting plate  
for guided load shown UP



**REDUCTION  
DRIVE  
BOTTOM RIGHT (SDBR)**  
mounting plate for  
guided load shown UP




**REDUCTION DRIVE  
TOP LEFT (SDTL)**  
mounting plate for  
guided load shown UP

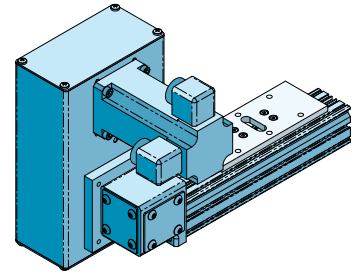


**REDUCTION DRIVE  
TOP RIGHT (SDTR)**  
mounting plate for  
guided load shown UP


### MXB-S




**REDUCTION DRIVE  
BOTTOM LEFT (SDBL)**  
mounting surface  
for load shown UP



**REDUCTION  
DRIVE  
BOTTOM RIGHT (SDBR)**  
mounting surface for load  
shown UP




**REDUCTION DRIVE  
TOP LEFT (SDTL)**  
mounting surface  
for load shown UP

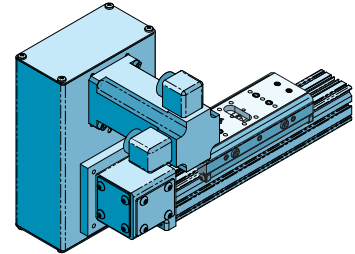


**REDUCTION DRIVE  
TOP RIGHT (SDTR)**  
mounting surface  
for load shown UP


### MXB-P




**REDUCTION DRIVE  
RIGHT BOTTOM (SDBR)**  
mounting surface  
for load shown UP




**REDUCTION DRIVE  
LEFT BOTTOM (SDLB)**  
mounting surface  
for load shown UP



**REDUCTION DRIVE  
RIGHT TOP (SDRT)**  
mounting surface  
for load shown UP

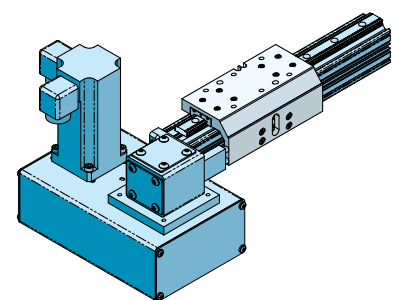

**REDUCTION DRIVE  
LEFT TOP (SDLT)**  
mounting surface  
for load shown UP

 See [tolomatic.com](http://tolomatic.com) for 3D solid model(s) with motor mounting dimensions



# MXB Rodless Belt Drive Actuator

## SWITCHES SPECIFICATIONS



MX products offer a wide range of sensing choices. There are 12 switch choices: reed, solid state PNP (sourcing) or solid state NPN (sinking); in normally open or normally closed; with flying leads or quick-disconnect.

Commonly used for end-of-stroke positioning, these switches allow drop-in installation anywhere along the entire actuator length. The one-piece design includes the retained fastening hardware. The magnet and magnet hardware are located on the carrier. See the dimensional drawings on page **MXB\_23** for details of magnet and switch locations. Switches and magnets can be installed in the field at any time.

Switches are used to send digital signals to PLC (programmable logic controller), TTL, CMOS circuit or other controller device. Switches contain reverse polarity protection. Solid state QD cables are shielded; shield should be terminated at flying lead end.

All switches are CE rated and are RoHS compliant. Switches feature bright red or yellow LED signal indicators; solid state switches also have green LED power indicators.



|             | Order Code | Lead | Switching Logic                | Power LED | Signal LED | Operating Voltage | **Power Rating (Watts) | Switching Current (mA max.) | Current Consumption | Voltage Drop | Leakage Current | Temp. Range                  | Shock / Vibration |
|-------------|------------|------|--------------------------------|-----------|------------|-------------------|------------------------|-----------------------------|---------------------|--------------|-----------------|------------------------------|-------------------|
| REED        | <b>R Y</b> | 5m   | SPST Normally Open             | —         | Red        | 5 - 240 AC/DC     | **10.0                 | 100mA                       | —                   | 3.0 V max.   | —               | 14 to 158°F<br>[-10 to 70°C] | 50 G / 9 G        |
|             | <b>R K</b> | QD*  |                                |           |            |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>N Y</b> | 5m   | SPST Normally Closed           | —         | Yellow     | 5 - 110 AC/DC     |                        |                             |                     |              |                 |                              |                   |
|             | <b>N K</b> | QD*  |                                |           |            |                   |                        |                             |                     |              |                 |                              |                   |
| SOLID STATE | <b>T Y</b> | 5m   | PNP (Sourcing) Normally Open   | Green     | Yellow     | 10 - 30 VDC       | **3.0                  | 100mA                       | 20 mA @ 24V         | 2.0 V max.   | 0.05 mA max.    |                              |                   |
|             | <b>T K</b> | QD*  |                                |           |            |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>K Y</b> | 5m   | NPN (Sinking) Normally Open    | Green     | Red        |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>K K</b> | QD*  |                                |           |            |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>P Y</b> | 5m   | PNP (Sourcing) Normally Closed | Green     | Yellow     |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>P K</b> | QD*  |                                |           |            |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>H Y</b> | 5m   | NPN (Sinking) Normally Closed  | Green     | Red        |                   |                        |                             |                     |              |                 |                              |                   |
|             | <b>H K</b> | QD*  |                                |           |            |                   |                        |                             |                     |              |                 |                              |                   |


\*QD = Quick-disconnect

Enclosure classification IEC 529 IP67 (NEMA 6)

CABLES: Robotic grade, oil resistant polyurethane jacket, PVC insulation

**⚠️\*\*WARNING:** Do not exceed power rating (Watt = Voltage x Amperage). Permanent damage to sensor will occur.

## SWITCH INSTALLATION AND REPLACEMENT








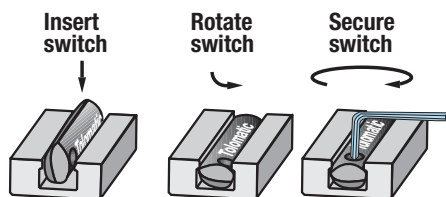


Place switch in side groove on tube at desired location with "Tolomatic" facing outward. While applying light pressure to the switch, rotate the switch halfway into the groove. Maintaining light pressure, rotate the switch in the opposite direction until it is fully inside the groove with "Tolomatic" visible. Re-position the switch to the exact location and lock the switch securely into place by tightening the screw on the switch.

# MXB Rodless Belt Drive Actuator


## SWITCHES

### WIRING DIAGRAMS

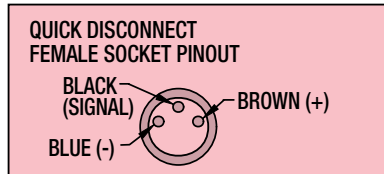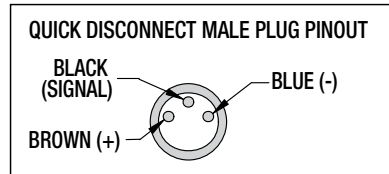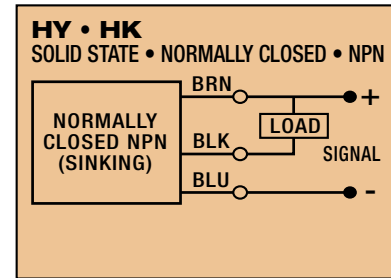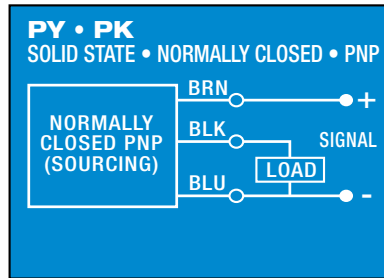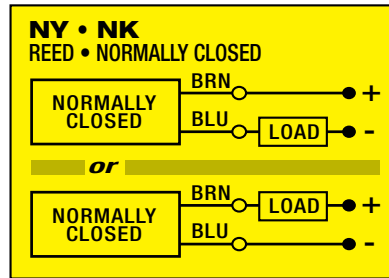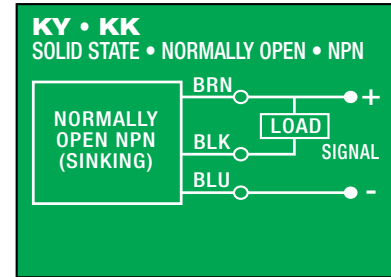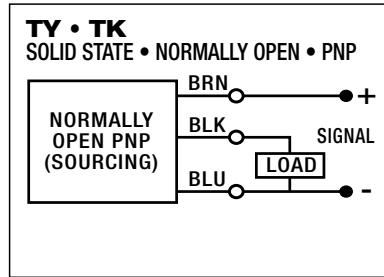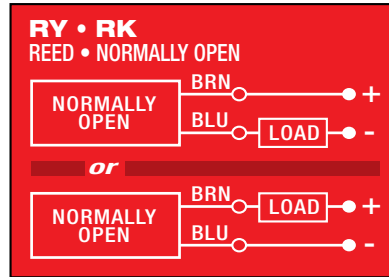


### MOUNTING DIMENSIONS


#### MXB-U

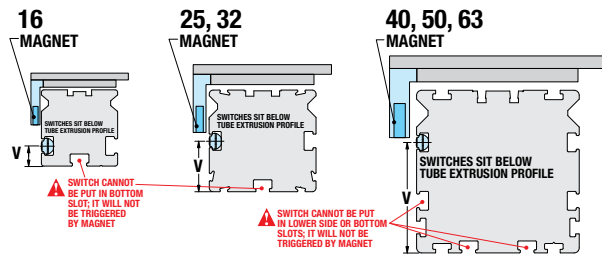


#### MXB-S

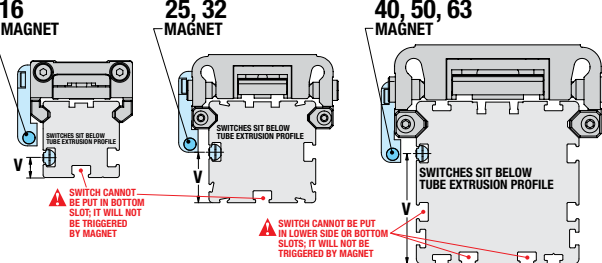

#### MXB-P

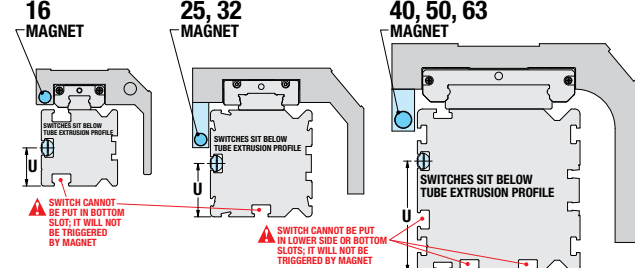

### SWITCH DIMENSIONS

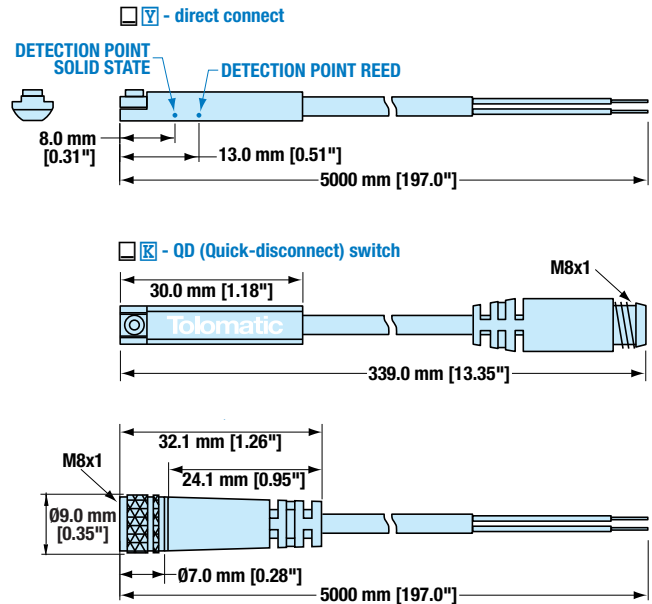







### SWITCH MOUNTING

| mm | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
|----|-------|-------|-------|-------|-------|-------|
| U  | 15.0  | 21.0  | 27.7  | 43.5  | 51.4  | 62.0  |
| V  | 7.9   | 20.0  | 27.0  | 43.5  | 51.4  | 62.0  |
| in | MXB16 | MXB25 | MXB32 | MXB40 | MXB50 | MXB63 |
| U  | 0.59  | 0.83  | 1.09  | 1.71  | 2.02  | 2.44  |
| V  | 0.31  | 0.79  | 1.06  | 1.71  | 2.02  | 2.44  |

⚠ NOTE: When ordering switches as a service part, Magnet Housing Kit (light blue in drawings) is required if actuator was not originally ordered with switches.

# COMPILE APPLICATION REQUIREMENTS

## ORIENTATION

 Horizontal

 Side

 Horizontal Down

 Vertical

 Angled °

 Load attached to carrier OR  Load supported by other mechanism

## DISTANCE FROM CENTER OF CARRIER TO LOAD CENTER OF GRAVITY


 $d_x$  \_\_\_\_\_  
 $d_y$  \_\_\_\_\_  
 $d_z$  \_\_\_\_\_

 inch  
 (U.S. Standard)

 millimeter  
 (Metric)

## STROKE LENGTH

 inch (S&K)  
 (U.S. Standard)

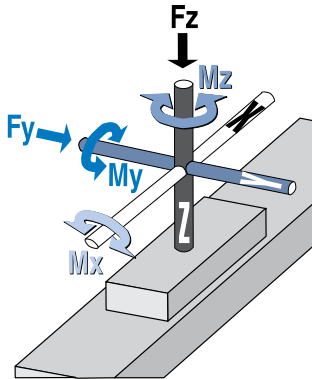 millimeters  
 (Metric)


## BENDING MOMENTS APPLIED TO CARRIER

 in.-lbs.  
 (U.S. Standard)

 N-m  
 (Metric)

 $M_x$  \_\_\_\_\_  
 $M_y$  \_\_\_\_\_  
 $M_z$  \_\_\_\_\_

## PRECISION

Repeatability \_\_\_\_\_

 inch

 millimeters

**NOTE:** If load or force on carrier changes during cycle use the highest numbers for calculations

## LOAD

 lb.  
 (U.S. Standard)

 kg.  
 (Metric)

## THRUST REQUIRED



 lbf.  
 (U.S. Standard)

 N  
 (Metric)

 $F_z$  \_\_\_\_\_  
 $F_y$  \_\_\_\_\_

## OPERATING ENVIRONMENT

Temperature, Contamination, etc.


 Direct Drive

 Reduction Drive

## MOVE PROFILE

Move Distance \_\_\_\_\_

 inch

 millimeters

Dwell Time After Move \_\_\_\_\_

 in/sec

 mm/sec

Max. Speed \_\_\_\_\_

## MOVE TIME


 sec

## NO. OF CYCLES

 per minute

 per hour

## MOTION PROFILE

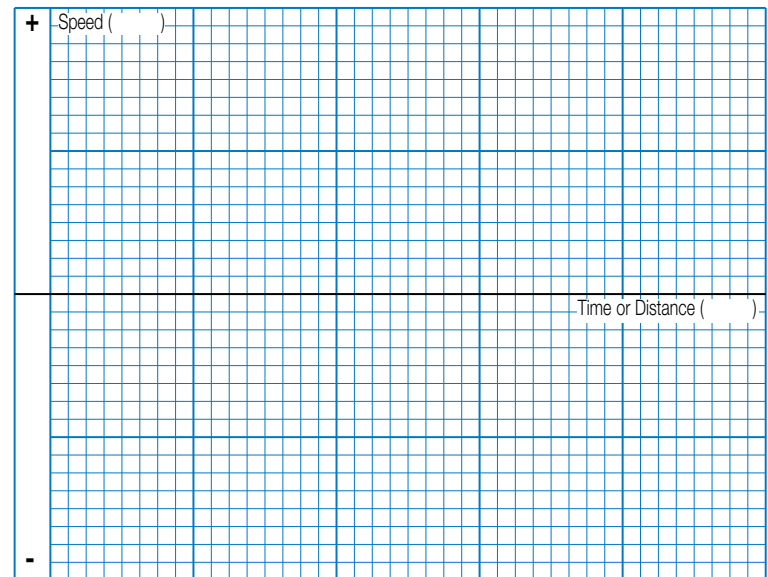

Graph your most demanding cycle, including accel/decel, velocity and dwell times. You may also want to indicate load variations and I/O changes during the cycle. Label axes with proper scale and units.



USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT [www.tolomatic.com](http://www.tolomatic.com) OR... CALL TOLOMATIC 1-800-328-2174 with the above information. We will provide any assistance needed to determine the proper MX actuator for the job.

**FAX 1-763-478-8080**

## CONTACT INFORMATION

Name, Phone, Email  
 Co. Name, Etc.

---



---



---

# SELECTION GUIDELINES

The process of selecting a belt drive actuator for a given application can be complex. **It is highly recommended that you contact Tolomatic or a Tolomatic distributor for assistance in selecting the best actuator for your application.** The following overview of the selection guidelines are for educational purposes only.

## 1 CHOOSE ACTUATOR SIZE

Choose an actuator that has the thrust, speed and moment load capacity to move the load.

- A) For maximum thrust use the table below.
- B) Max. speed of MXB-U 200 in/sec (5 m/sec); Max. speed of MXB-S 100 in/sec (2.5 m/sec) Max. speed of MXB-P 150 in/sec (3.8 m/sec).
- C) For MXB-S moment and load capacities see tables on page MXB\_12. For MXB-P moment and load capacities see tables on page MXB\_13.

| SIZE | MAXIMUM THRUST |      |
|------|----------------|------|
|      | lbf            | N    |
| 16   | 38             | 169  |
| 25   | 151            | 672  |
| 32   | 209            | 930  |
| 40   | 250            | 1112 |
| 50   | 325            | 1446 |
| 63   | 418            | 1859 |

## 2 COMPARE LOAD TO MAXIMUM LOAD CAPACITIES

Calculate the application load (combination of load mass and forces applied to the carrier) and application bending moments (sum of all moments  $M_x$ ,  $M_y$ , and  $M_z$  applied to the carrier). Be sure to evaluate the magnitude of dynamic inertia moments. When a rigidly attached load mass is accelerated or decelerated, its inertia induces bending moments on the carrier. Careful attention to how the load is decelerated at the end of the stroke is required for improved actuator performance and application safety. If either load or any of the moments exceed figures indicated in the Moment and Load Capacity tables (page MXB\_12 & 13) for the actuator consider:

- 1) A higher capacity carrier (ie. **S** to **P**)
- 2) A larger actuator size

### 3) Auxiliary carrier

- 4) External guide system (if the load is externally supported and guided, consider using MXB-U)

## 3 CALCULATE LOAD FACTOR (LF)

For loads with a center of gravity offset from the carrier account for both applied (static) and dynamic loads. The load factor (LF) must not exceed the value of 1.

$$L_f = \frac{M_x}{M_{x_{max}}} + \frac{M_y}{M_{y_{max}}} + \frac{M_z}{M_{z_{max}}} + \frac{F_y}{F_{y_{max}}} + \frac{F_z}{F_{z_{max}}} \leq 1$$


If  $L_f$  does exceed the value of 1, consider the four choices listed in step #2.

## 4 ESTABLISH YOUR MOTION PROFILE AND CALCULATE ACCELERATION RATE

Using the application stroke length and maximum carrier velocity (or time to complete the linear motion), establish the motion profile. Select either triangular (accel-decel) or trapezoidal (accel-constant speed-decel) profile. Now calculate the maximum acceleration and deceleration rates of the move. Acceleration/ deceleration should not exceed 1200 in/sec<sup>2</sup> (30.48 m/sec<sup>2</sup>). Also, do not exceed safe rates of dynamic inertia moments determined in step #3.

### SPEED FACTOR

FOR APPLICATIONS WITH HIGH SPEED OR SIGNIFICANT SHOCK AND VIBRATION: Calculated values of loads and bending moments must be increased by speed factor from the graph below to obtain full rated life of profiled rail bearing system.

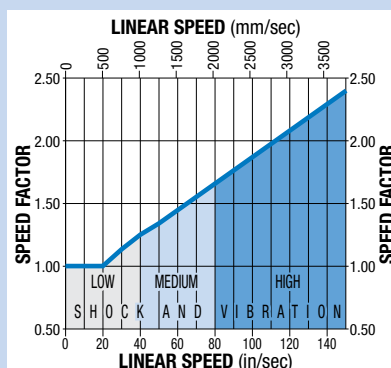

## 5 SELECT MOTOR (GEARHEAD IF NECESSARY) AND DRIVE

To help select a motor and drive, use the sizing equations located in the Engineering Resources section of the Tolomatic Electric Products Catalog (#3600-4609) to calculate the application thrust and torque requirements. Refer to Motor sections to determine the motor and drive.

## 6 DETERMINE MOUNTING PLATE REQUIREMENTS

- Consult the Mounting Plate Requirements graph for the model selected (page MXB\_11)

- Cross reference the application load and maximum distance between supports

- Select the appropriate number of mounting plates


## 7 CONSIDER OPTIONS

- Choose metric or inch (U.S. standard) load mounting. When ordering use **S****I** for inch and **S****M** for metric.
- Switches - Reed, Solid State PNP or NPN, all available normally open or normally closed
- **F****L** Floating mount bracket - used when lack of parallelism occurs between the actuator and an externally guided and supported load (available for **S** Solid bearing style MXB actuators)



USE THE TOLOMATIC SIZING AND SELECTION SOFTWARE AVAILABLE ON-LINE AT [www.tolomatic.com](http://www.tolomatic.com) OR... CALL TOLOMATIC AT 1-800-328-2174. We will provide any assistance needed to determine the proper MX actuator for the job.

### **S** SOLID BEARING 2:1 RULE



For applications using **S** solid bearings, binding or interrupted motion may occur if the load offset is equal to or greater than twice the bearing length (1X). LOAD OFFSET is defined as: the distance from the applied force (or the load center of gravity) to the centerline of the carrier.

If the load offset cannot be changed consider:

- 1.) Higher capacity bearing style, i.e. **S** to **P**
- 2.) Larger actuator size
- 3.) Auxiliary carrier
- 4.) Add external guides



# MXB Rodless Belt Drive Actuators

## SERVICE PARTS ORDERING

### SWITCHES

Switches for MXB include retained mounting hardware and are the same for all actuator sizes and bearing styles

| Code              | Lead             | Normally | Sensor Type     |
|-------------------|------------------|----------|-----------------|
| <b>R</b> <b>Y</b> | 5m (197 in)      | Open     | Reed            |
| <b>R</b> <b>K</b> | Quick-disconnect |          |                 |
| <b>N</b> <b>Y</b> | 5m (197 in)      | Closed   | Reed            |
| <b>N</b> <b>K</b> | Quick-disconnect |          |                 |
| <b>T</b> <b>Y</b> | 5m (197 in)      | Open     | Solid State PNP |
| <b>T</b> <b>K</b> | Quick-disconnect |          |                 |
| <b>K</b> <b>Y</b> | 5m (197 in)      | Open     | Solid State NPN |
| <b>K</b> <b>K</b> | Quick-disconnect |          |                 |
| <b>P</b> <b>Y</b> | 5m (197 in)      | Closed   | Solid State PNP |
| <b>P</b> <b>K</b> | Quick-disconnect |          |                 |
| <b>H</b> <b>Y</b> | 5m (197 in)      | Closed   | Solid State NPN |
| <b>H</b> <b>K</b> | Quick-disconnect |          |                 |

NOTE: All switch kits include retained hardware. Quick-disconnect kits include female connector

**⚠** NOTE: When ordering switches as service part, Magnet Housing Kit is required if actuator was not originally ordered with switches

To order switch kit use configuration code for switch preceded by SW and actuator code.

EXAMPLE: **SWMXB25KK**

KIT
ACTUATOR
SIZE
SWITCH CODE

The example is for Solid State NPN, Normally Open Switch with Quick-disconnect couplers. Each switch kit is complete with Bracket, Set Screw, Switch and mating QD cable. Note that the bracket/switch size is common and may be used on any size MXB.

### ACS SERVO & STEPPER DRIVES WITH ETHERNET




#### STEPPER & BRUSHLESS SERVO MOTORS

- Motors • Drives • Gearboxes

Tolomatic offers digital servo or stepper drives with motors matched to provide optimal performance with Tolomatic actuators.

### SELECT A COMPLETE SYSTEM FROM TOLOMATIC OR ADD ANY MOTION SYSTEM TO OUR ACTUATORS

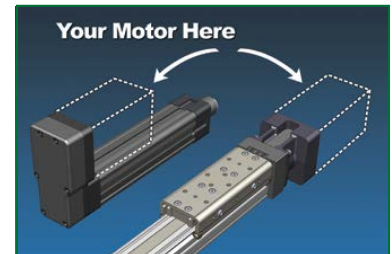

#### "YOUR MOTOR HERE" MADE-TO-ORDER MOTOR MOUNTS. FAST DELIVERY.

- Select a high-performance Tolomatic electric actuator and we'll provide a motor-specific interface for your motor. With our online database, you can select from over 60 motor manufacturers and hundreds of models.

Visit [www.tolomatic.com/yhm](http://www.tolomatic.com/yhm) to find your motor/actuator match!

### OPTIONS

| MXB SIZE | Mounting Plate Kit | <b>S</b> (inch) Floating Mount Kit | <b>S</b> (metric) Floating Mount Kit | **MXB-U Magnet Housing Kit | **MXB-S Magnet Housing Kit | **MXB-P Magnet Housing Kit |
|----------|--------------------|------------------------------------|--------------------------------------|----------------------------|----------------------------|----------------------------|
| 16       | 8516-9030          | 8116-9536                          | <i>8116-9036</i>                     | 8516-9024                  | 8516-9074                  | 8340-1008                  |
| 25       | 8525-9030          | 8525-9536                          | <i>8525-9136</i>                     | 8525-9024                  | 8525-9074                  | 8525-9009                  |
| 32       | 8532-9030          | 8132-9536                          | <i>8132-9036</i>                     | 8525-9024                  | 8532-9074                  | 8532-9009                  |
| 40       | 8540-9030          | 8140-9536                          | <i>8140-9036</i>                     | 8525-9024                  | 8540-9074                  | 8540-9009                  |
| 50       | 8550-9030          | 8550-9536                          | <i>8550-9036</i>                     | 8550-9024                  | 8550-9074                  | 8550-9009                  |
| 63       | 8563-9030          | 8163-9536                          | <i>8163-9036</i>                     | 8550-9024                  | 8563-9074                  | 8563-9009                  |

\*\*\*Magnet Housing Kit is required if actuator was not originally ordered with switches

Configure an actuator and a complete motion control system today using Tolomatic's easy-to-use on-line sizing & selection



Available FREE at [www.tolomatic.com](http://www.tolomatic.com)

**⚠** Click here for a video of MX\_-S carrier adjustment procedures

# MXB Rodless Belt Drive Actuators

## ORDERING

MODEL SELECTION (MUST BE IN THIS ORDER)

**MXB 40 P BWS30 SM2007-02**

**SDB**

OPTIONS (IN ANY ORDER)

**DC215-9 MP8 HC2 TK2**

**MODEL**  
MXB MX Rodless Belt Drive Actuators

**SERIES**  
16 Series actuator    40 Series actuator  
25 Series actuator    50 Series actuator  
32 Series actuator    63 Series actuator

**BEARING**  
U Unguided Carrier  
S Solid Bearing Carrier  
P Profiled Rail Bearing Carrier

**BELT MATERIAL AND WIDTH**  
BWS10 10 mm Urethane Steel (MXB16)  
BWS18 18 mm Urethane Steel (MXB25)  
BWS25 25 mm Urethane Steel (MXB32)  
BWS30 30 mm Urethane Steel (MXB40)  
BWS40 40 mm Urethane Steel (MXB50)  
BWS50 50 mm Urethane Steel (MXB63)

**STROKE LENGTH & MOUNTING TYPE**  
SK \_\_\_\_\_ Stroke, enter desired stroke length in **inches**  
SM† \_\_\_\_\_ Stroke, enter desired stroke length in **millimeters**  
GPB Blank Plate (MXB-U only)  
NO MOUNTING HOLES allowing user to drill and tap as needed  
**NOTE: Actuator mounting threads and mounting fasteners will be either inch or metric, depending on how stroke length is indicated**  
**SK=inch mounting**  
**SM= metric mounting**

† The metric version provides metric tapped holes for mounting of the load to the carrier and of the actuator to mounting surfaces



**U & S MOTOR MOUNTING/REDUCTION**  
(must choose one)  
SDL, SDLD\* Direct Drive on Left  
SDR, SDRD\* Direct Drive on Right  
⚠ A motor size and code must be selected when specifying a 3:1 reduction. (2:1 reduction on MXB16)  
SDTL, SDTLD\* 3:1 Reduction on Top Left  
SDTR, SDTRD\* 3:1 Reduction on Top Right  
SDBL, SDBLD\* 3:1 Reduction on Left Bottom  
SDBR, SDBRD\* 3:1 Reduction on Right Bottom  
**\*For Dual Stub Shaft Option**

**P MOTOR MOUNTING / REDUCTION**  
(must choose one)  
SDT, SDTD\* Direct Drive on Top  
SDB, SDBD\* Direct Drive on Bottom  
⚠ A motor size and code must be selected when specifying a 3:1 reduction. (2:1 reduction on MXB16)  
SDLT, SDLTD\* 3:1 Reduction on Left Top  
SDRT, SDRTD\* 3:1 Reduction on Right Top  
SDLB, SDLBD\* 3:1 Reduction on Left Bottom  
SDRB, SDRBD\* 3:1 Reduction on Right Bottom  
**\*For Dual Stub Shaft Option**

**AUXILIARY CARRIER**  
DC \_\_\_\_\_ Auxiliary Carrier, (MXB-P only) enter center-to-center spacing desired in **inches (SK)** or **millimeters (SM)**  
(Same unit of measure as stroke length is required)  
⚠ Center-to-center spacing between carriers adds to overall length of the actuator, this distance will not be subtracted from stroke length specified in the previous step

⚠ Not all codes listed are compatible with all options.

Call Tolomatic 1-800-328-2174 to determine available options and accessories based on your application requirements.

VISIT [www.tolomatic.com](http://www.tolomatic.com)  
FOR COMPLETE, UP-TO-DATE INFORMATION

**HEAD COVER PLATES**  
HC2 Head Cover Plates

**MOUNTING**  
MP\_ Mounting Plates, & quantity  
TC\_ Tube Clamps, & quantity  
NOTE: The MXB requires Mounting Plates to allow clearance for motor when mounted flush to surface.  
16,25,32 sizes use T-Nuts with Mounting Plates.  
40,50,63 sizes use Tube Clamps with Mounting Plates.

**P CARRIER ORIENTATION**  
BIR Mirrored Carrier Design

**MOTOR / DRIVE / CONTROLLER / PLANETARY GEARBOX**  
⚠ Reference the ordering pages in Tolomatic Electric Product Brochures Stepper Products Brochure #3600-4160 & Planetary Gearbox Doc. #3600-4161

|             |        | SWITCHES |                  |           |                                   | QUANTITY             | LEAD LENGTH |
|-------------|--------|----------|------------------|-----------|-----------------------------------|----------------------|-------------|
| TYPE        | LOGIC  | NORMALLY | QUICK-DISCONNECT | CODE      |                                   |                      |             |
| REED        | SPST   | Open     | no               | <b>RY</b> | After code enter quantity desired | 5 meters (16.4 feet) |             |
|             |        |          | QD               | <b>RK</b> |                                   |                      |             |
| SOLID STATE | PNP    | Open     | no               | <b>TY</b> |                                   |                      |             |
|             |        |          | QD               | <b>TK</b> |                                   |                      |             |
|             | NPN    | Open     | no               | <b>KY</b> |                                   |                      |             |
|             |        |          | QD               | <b>KK</b> |                                   |                      |             |
|             | PNP    | Closed   | no               | <b>PY</b> |                                   |                      |             |
|             |        |          | QD               | <b>PK</b> |                                   |                      |             |
| NPN         | Closed | no       | <b>HY</b>        |           |                                   |                      |             |
|             |        | QD       | <b>HK</b>        |           |                                   |                      |             |

# The Tolomatic Difference Expect More From the Industry Leader:



## INNOVATIVE PRODUCTS

Unique linear actuator solutions with Endurance Technology<sup>SM</sup> to solve your challenging application requirements.



## FAST DELIVERY

The fastest delivery of catalog products... Built-to-order with configurable stroke lengths and flexible mounting options.



## ACTUATOR SIZING

Online sizing that is easy to use, accurate and always up-to-date. Find a Tolomatic electric actuator to meet your requirements.



## YOUR MOTOR HERE

Match your motor with compatible mounting plates that ship with any Tolomatic electric actuator.




## LIBRARY

Easy to access CAD files available in the most popular formats to place directly into your assembly.



## TECHNICAL SUPPORT

Extensive motion control knowledge: Expect prompt, courteous replies to any application and product questions from Tolomatic's industry experts.

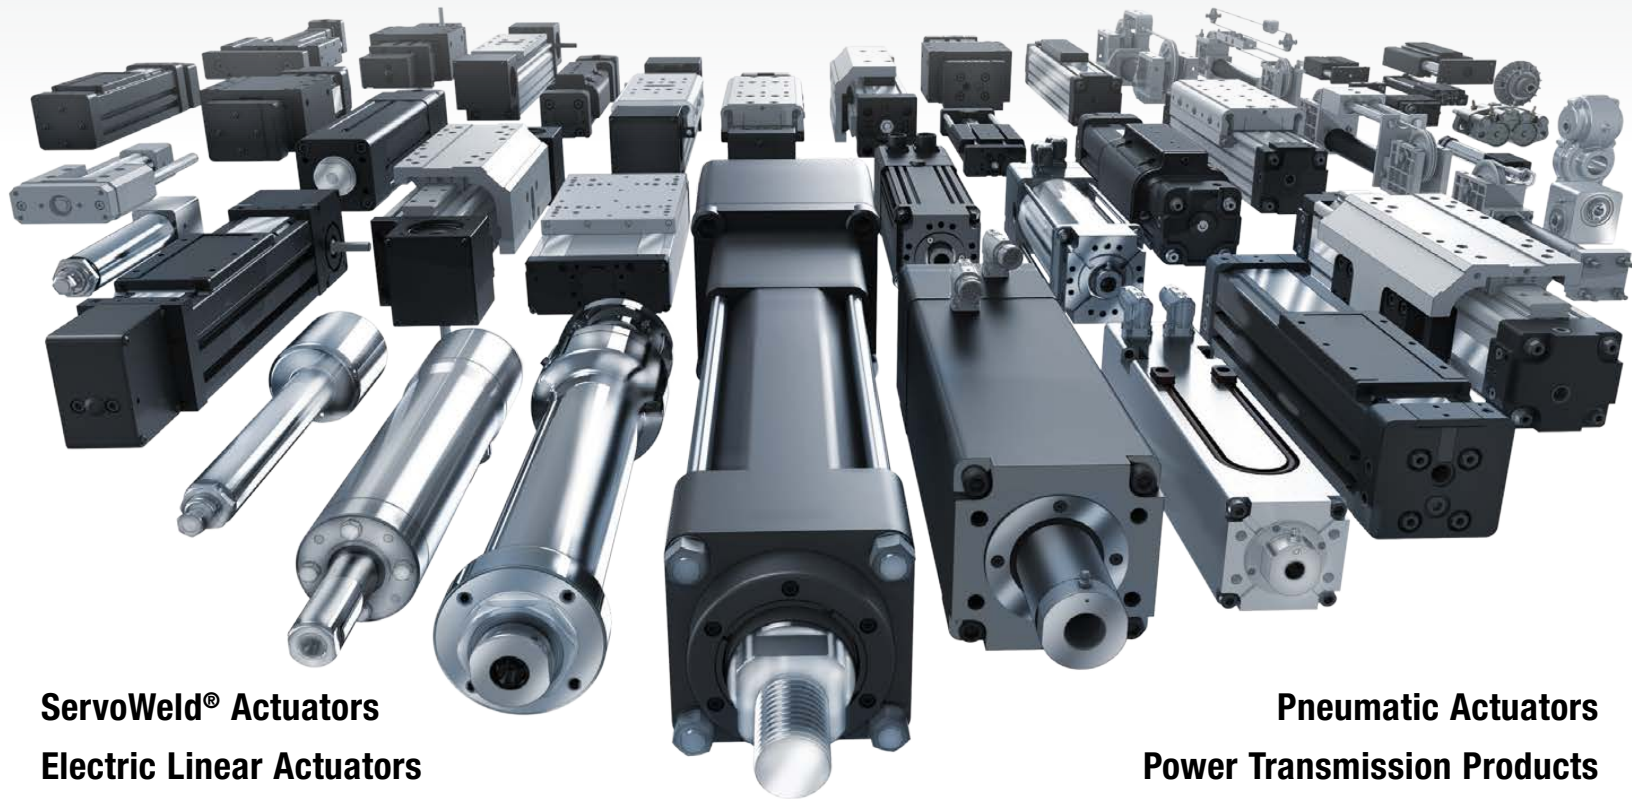

**ServoWeld<sup>®</sup> Actuators**  
**Electric Linear Actuators**

**Pneumatic Actuators**  
**Power Transmission Products**

# Tolomatic<sup>TM</sup>

EXCELLENCE *IN MOTION*

COMPANY WITH  
QUALITY SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =  
Certified site: Hamel, MN

### USA - Headquarters

#### Tolomatic Inc.

3800 County Road 116  
Hamel, MN 55340, USA

**Phone:** (763) 478-8000

Toll-Free: **1-800-328-2174**

sales@tolomatic.com

[www.tolomatic.com](http://www.tolomatic.com)

### MEXICO

#### Centro de Servicio

Parque Tecnológico Innovación  
Int. 23, Lateral Estatal 431,  
Santiago de Querétaro,  
El Marqués, México, C.P. 76246

**Phone:** +1 (763) 478-8000

help@tolomatic.com

### EUROPE

#### Tolomatic Europe GmbH

Elisabethenstr. 20  
65428 Rüsselsheim  
Germany

**Phone:** +49 6142 17604-0

help@tolomatic.eu

### CHINA

#### Tolomatic Automation Products (Suzhou) Co. Ltd.

No. 60 Chuangye Street, Building 2  
Huqiu District, SND Suzhou  
Jiangsu 215011 - P.R. China

**Phone:** +86 (512) 6750-8506

TolomaticChina@tolomatic.com

All brand and product names are trademarks or registered trademarks of their respective owners. Information in this document is believed accurate at time of printing. However, Tolomatic assumes no responsibility for its use or for any errors

that may appear in this document. Tolomatic reserves the right to change the design or operation of the equipment described herein and any associated motion products without notice. Information in this document is subject to change without notice.

Visit [www.tolomatic.com](http://www.tolomatic.com) for the most up-to-date technical information