


Easily Add Illumination and Value to Your Workbench or Profile Extrusion Project with Compact LED Lighting Devices from Modular Guarding Solutions

MODULAR GUARDING SOLUTIONS



FEATURES	
Profile Slot Size	8mm
Colors	White, Green, Red & Blue
Power Source	24 VDC Power Supply (Not Included)
Protection Rating	IP 55 / Protection Class: III
Luminous Efficiency	79 lm/W (1200 lm/m)
Number of LEDs	120 led/m
Color Rendering Index	CRI > 80
Service Life	L70(6K) > 248000 h

LED LIGHTS

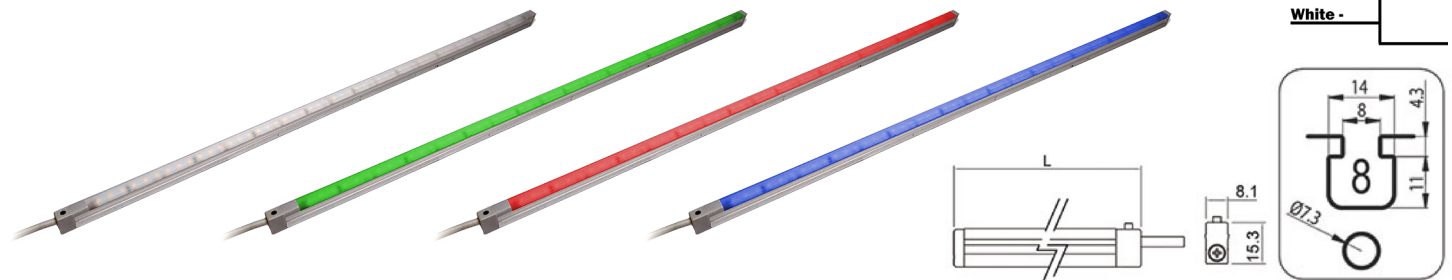

PART NUMBER	VOLTAGE	NOMINAL POWER (W)	LIGHT COLOR	LENGTH	WEIGHT
61-510-250	24 VDC	3.75	WHITE	250MM	65 G
61-510-500	24 VDC	7.5	WHITE	500MM	120 G
61-510-1000	24 VDC	15	WHITE	1000MM	230 G
61-510-1990	24 VDC	30	WHITE	1990MM	450 G
61-510-2990	24 VDC	45	WHITE	2990MM	680 G
61-520-250	24 VDC	3.75	GREEN	250MM	65 G
61-520-500	24 VDC	7.5	GREEN	500MM	65 G
61-530-250	24 VDC	3.75	RED	250MM	65 G
61-530-500	24 VDC	7.5	RED	500MM	65 G
61-540-250	24 VDC	3.75	BLUE	250MM	65 G
61-540-500	24 VDC	7.5	BLUE	500MM	65 G

Ask us about our

Flotronics NOW

SAME DAY SHIPPING/PICK-UP ITEMS*



sales@flotronicsautomation.com

Flotronics Automation—East
10435 Ortonville Rd. | Clarkston, MI 48348
Phone: 248-625-8990 | Fax: 248-625-8818

www.flotronicsautomation.com


Flotronics Automation—West
3542 Roger B. Chaffee SE | Wyoming, MI 49548
Phone: 616-682-7013 | Fax: 248-625-8818

POWER SUPPLIES

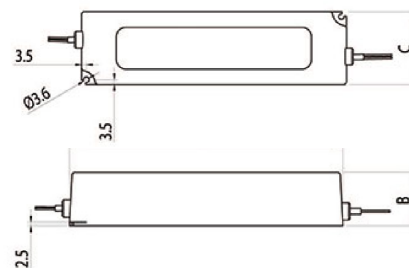

FOR LED LIGHT	POWER SUPPLY PART NUMBER	VOLTAGE	RATED POWER	A	B	C	WEIGHT
61-510-0	61-560-20W	24 VDC	20.2 W	118MM	26MM	35MM	0.22 G
61-520-0							
61-530-0							
61-510-2							
61-510-1							
61-510-3							
61-520-2							
61-520-1							
61-520-3	61-560-60W	24 VDC	60 W	162.5MM	32MM	42.5MM	0.40 G
61-540-0							
61-550-0							

LIGHTING DIAGRAM ON A FLAT SURFACE

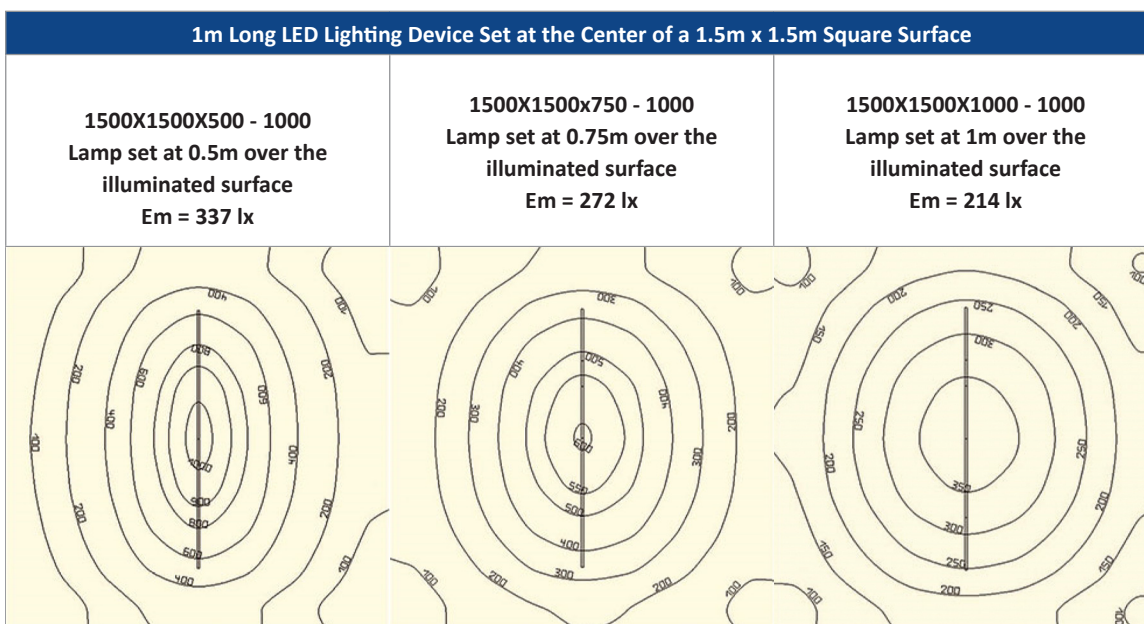

Did you know Flotronics Automation offers **pressure switches, gauges and other pressure sensors**? Contact us for a quote today!