
VG.IS70P bellows suction cups in polyurethane

- Ideal to handle uneven and rough surfaces
- High flexibility: the wide yet thin lip allows for adaptation to uneven surfaces
- Polyurethane material with double hardness, 30/60 Shore
- Good resistance to wear



Application example

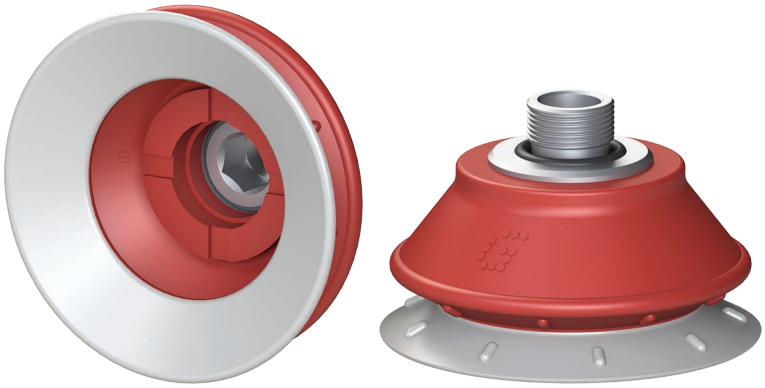

Technical data


Material	Lifting force [N] perpendicular to the surface, at various vacuum levels			Lifting force [N] parallel to the surface, at various vacuum levels			Volume	Min curve radius	Max vertical movement	Suction cup weight
	-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa	[cm³]	[mm]	[mm]	[g]
PU30/60	60.4	113.5	170.3	42.3	75.2	123.1	41.5	51	16.3	40

Technical features

Material	Colour	Hardness	Temperature range
Polyurethane PU, 30/60 Shore	Grey / Red	30/60 Shore	+10 ÷ +45 °C


Identification codes			
Drawing	Alphanumeric code	Suction cups with fitting	Order code
A	VG.IS70P.30/60.G38M	VG.IS70 suction cup, polyurethane, 30/60 Shore, G3/8" male	2322217

A



Identification codes			
Drawing	Alphanumeric code	Suction cups	Order code
A	VG.IS70P.30/60	VG.IS70 suction cup, polyurethane, 30/60 Shore	2322216

A



Identification codes			
Drawing	Alphanumeric code	Fittings	Order code
A	FT.G38M.199	G3/8" male fitting	1900039

A

